



充油式 / 接點式PP隔膜壓力計

LIQUID FILLED PP DIAPHRAGM PRESSURE GAUGE OR
CONTACTOR ATTACHED PP DIAPHRAGM PRESSURE GAUGE

- DIAMETER : 2"、2.5"、3"、4"
面 徑 : 50、63、75、100(mm)
- PRESSURE RANGE : 0.35kg/cm²~50kg/cm²
壓力範圍 : 5psi~700psi
- CASING & BEZEL : SUS 304 or EPDM Surface, anti-shock PP, PVDF
殼、框 : 不銹鋼304或橡膠包覆EPDM或耐衝擊PP, 氟化樹脂
- CONNECTION : 1/4PT、1/2PT MOUNT or OTHER PANEL MOUNT
牙 口 : 標準1/4PT, 1/2PT 內牙或其他內外牙
- DIAPHRAGM : PP or TEFLON, PVDF
隔 膜 : PP或鐵氟龍或氟化樹脂
- CAPSULE : VITON or TEFLON
膜 片 : 氟素橡膠或鐵氟龍
- ACCURACY : $\pm 1.5\%$ F.S.D
精 確 度 : $\pm 1.5\%$ F.S.D
- TEMPERATURE RANGE : -10°C to +85°C (PP)
使 用 溫 度 範 圍 : -10°C to +160°C (TEFLON)



GF-ACM11



GD-ACM11P2



GF-ACF



GF-ACFH1



GE-ABC



GE-AC



GE-ACF



GC-AE



GC-ABC



GD-AC



FJ-CJM13P2



FJ-CM11P2



FM-CFJM13P2




GJ-C




GC-AC




GS-AC

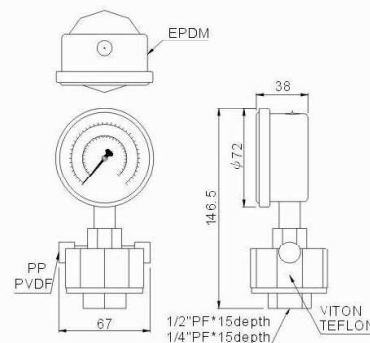


GC-ABC/25

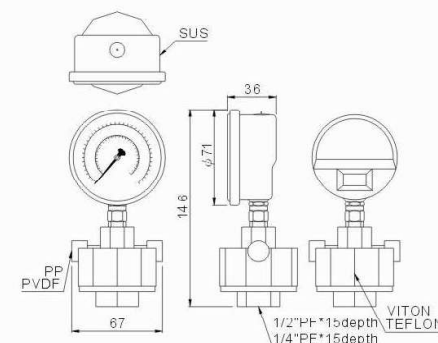


GC-AC/25

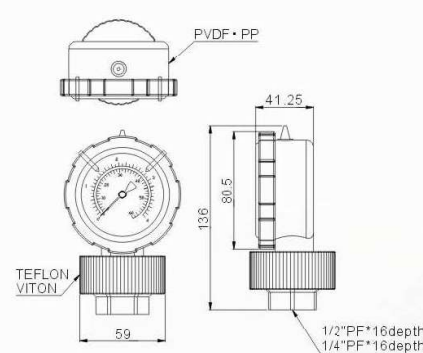


GS-AC/25

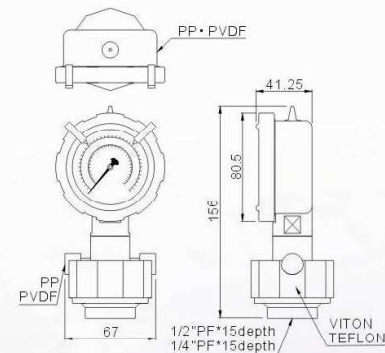

GD-AC/25

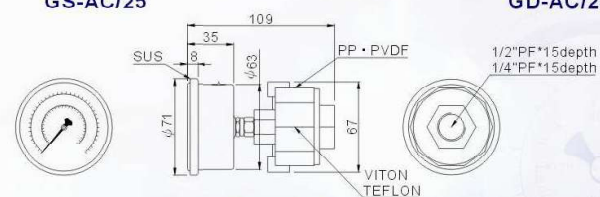

GE-AC/25

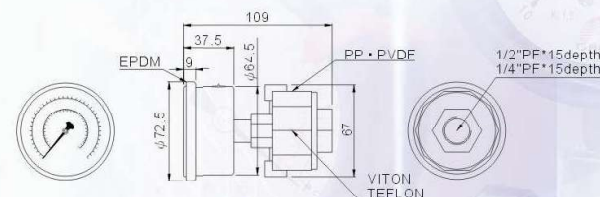

GE-ABC/25

