



冷煤壓力計

REFRIGERATION PRESSURE GAUGE

- DIAMETER : 2.4"、2.5"、2.6"
面 徑 : 60、63、68(mm)
- PRESSURE RANGE : -76cmHg~0~35kg/cm²
壓力範圍 : -30inHg~0~500psi
- CASING & BEZEL : Steel, Corrosion resistant black,
Blue or red paint or chrome plating(polished finish)
殼、框 : 鐵、防蝕黑色、藍色、紅色塗裝或鍍鉻, SUS框、藍色、紅色塗裝
- BOURDON TUBE : Phosphor bronze
巴登管 : 磷青銅
- CONNECTION : 7/16"-20UNF, 1/8 NPT, BSPT
牙 口 : 7/16"-20UNF, 1/8 NPT, BSPT
- ACCURACY : ±1.5%F.S.D
精確度 : ±1.5%F.S.D
- TEMPERATURE RANGE : -20°C to +60°C
使用溫度範圍 : -20°C to +60°C



DE-M2U

DE-M1U



DE-M6U



DE-M8U



DE-FM8



DG-FM8




DC-M10




DE-FM10




DE-FM9

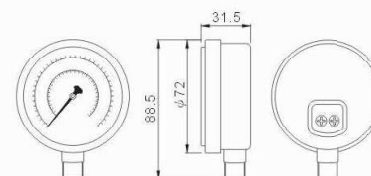


DC-M9/26
DC-M10/26

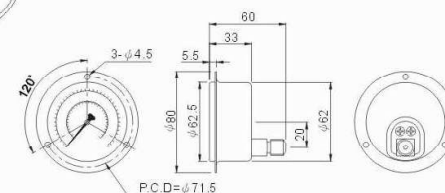


DG-FM9/24 . DG-FM10/24
DG-FM5/24 . DG-FM8/24

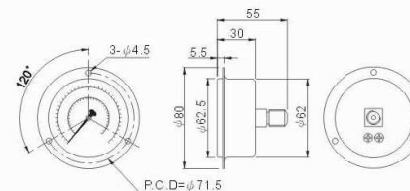


DE-FM9/24 . DE-FM10/24
DE-FM5/24 . DE-FM8/24

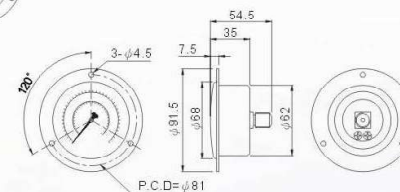


DE-FM9/26 . DE-FM10/26
DE-FM5/26 . DE-FM8/26

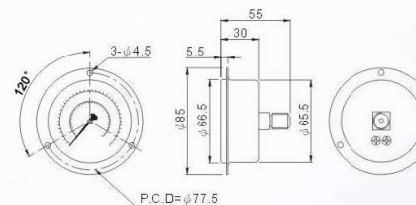

DE-FM9/25 . DE-FM10/25
DE-FM5/25 . DE-FM8/25

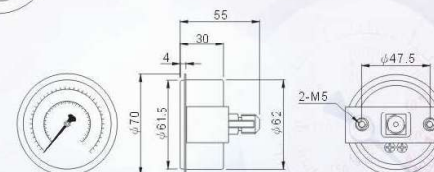

DE-M8U/24

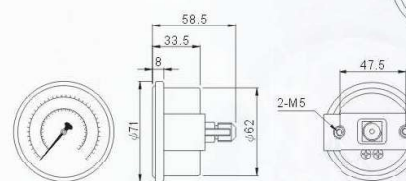

DE-M1U/24 . DE-M2U/24
DE-M6U/24