


尺寸圖 Dimension

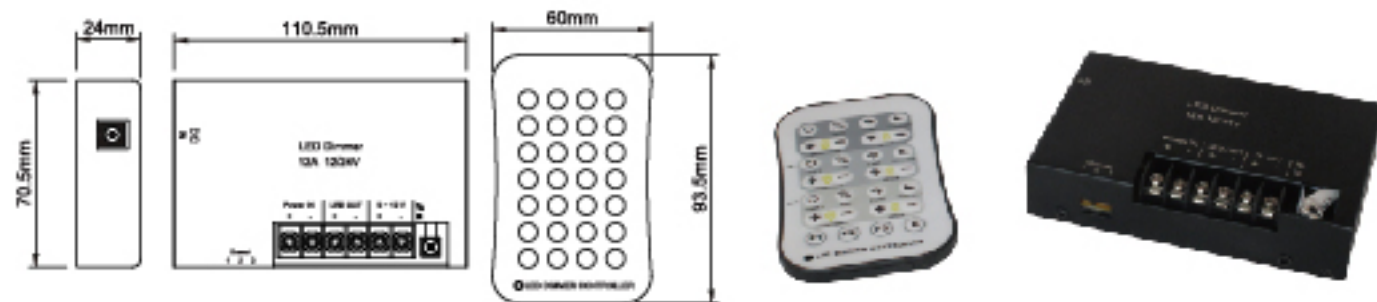

規格 Specification


- IR遙控器。
- 單色調光。
- 自動記憶功能。
- 最大輸出電流：12A。
- DC12V 或 24V PWM訊號輸出。
- 可加放大器,增加負載。
- IR-remote controller
- Single Color Dimming
- Auto-Memory
- Max Current Output : 12A
- DC12V or 24V PWM Signal Output
- Repeater Available

特性 Order Information

IR DIMMER CONTROLLER

Part No.	Dimension (mm)	PWM Output	Max. Operation Current(A)	Output Voltage(V)
RPWM-DIM-12A	110x70x25	+ - (Single Color)	12A	DC12V/24V

尺寸圖 Dimension

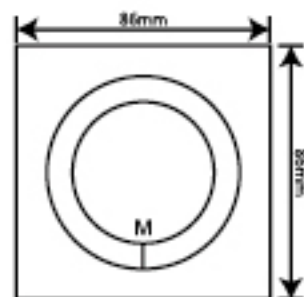

規格 Specification


- 觸控面板。
- 單色調光。
- 自動記憶功能。
- 最大輸出電流：8A。
- DC12V 或 24V PWM訊號輸出。
- Touched Panel
- Single Color Dimming
- Auto-Memory
- Max Current Output : 8A
- DC12V or 24V PWM Signal Output

特性 Order Information

TOUCH PANEL DIMMER

Part No.	Dimension (mm)	PWM Output	Max. Operation Current(A)	Output Voltage(V)
RPWM-TDIM-8A	86x86x36	+ - (Single Color)	8A	DC12V/24V

尺寸圖 Dimension

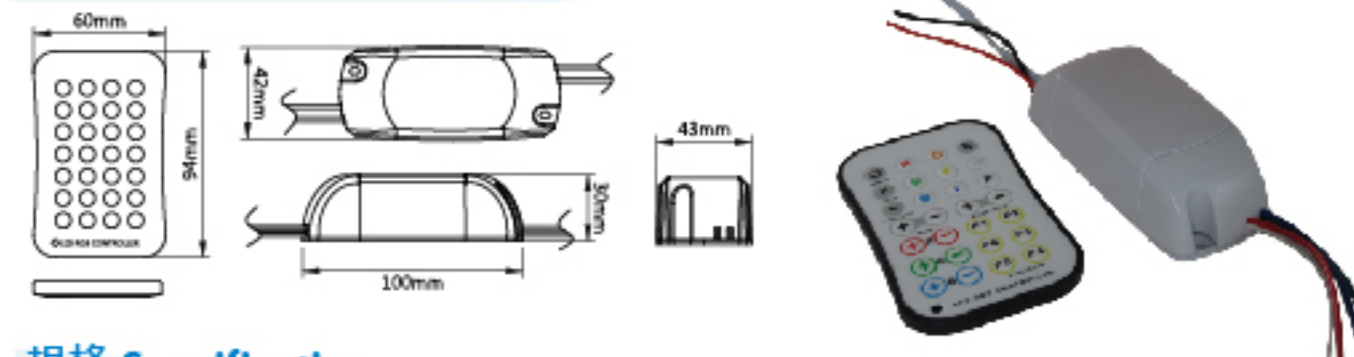

規格 Specification


- IR遙控器。
- 內建六組LED變化節目。
- R、G、B可分別單獨調光, 附加自動儲存功能。
- 共正控制。
- 最大輸出電流：6A。
- DC12V 或 24V PWM訊號輸出。
- IR-remote controller
- Build In 6 programs
- RGB Dimmer and Auto-Memory
- Common+
- Max Current Output : 6A
- DC12V or 24V PWM Signal Output

特性 Order Information

IR RGB CONTROLLER

Part No.	Dimension (mm)	PWM Output	Max. Operation Current(A)	Output Voltage(V)
RPWM-RGB6A	100x43x30	+RGB	6A	DC12V/24V

尺寸圖 Dimension

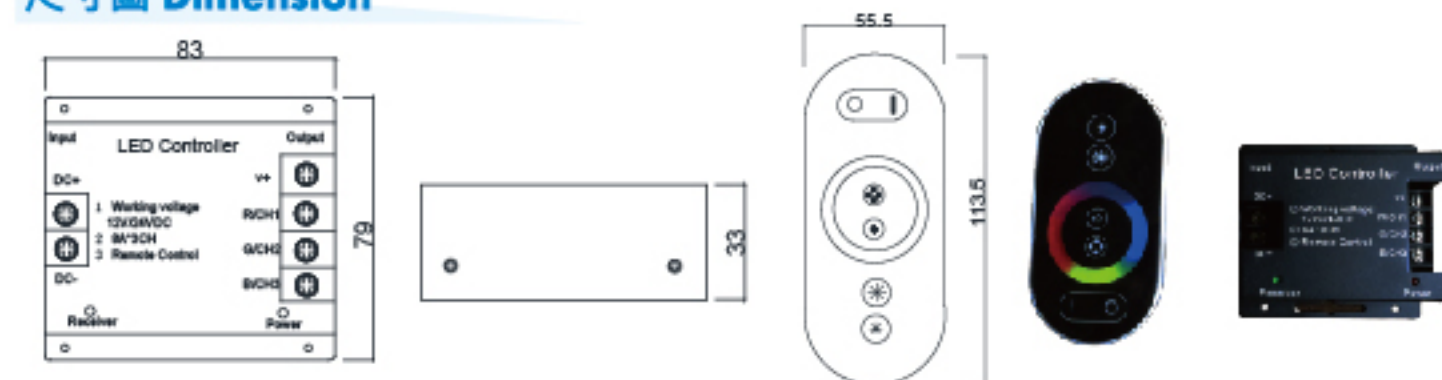

規格 Specification


- IR遙控器。
- 內建17組LED變化節目。
- R、G、B可分別單獨調光, 附加自動儲存功能。
- 共正控制。
- 最大輸出電流：24A。
- DC12V 或 24V PWM訊號輸出。
- 可加放大器,增加負載。
- IR-remote controller
- Build In 17 programs
- RGB Dimmer and Auto-Memory
- Common+
- Max Current Output : 24A
- DC12V or 24V PWM Signal Output
- Repeater Available

特性 Order Information

IR RGB CONTROLLER

Part No.	Dimension (mm)	PWM Output	Max. Operation Current(A)	Output Voltage(V)
RPWM-RGB24A	83x79x33	+RGB	24A	DC12V/24V

尺寸圖 Dimension

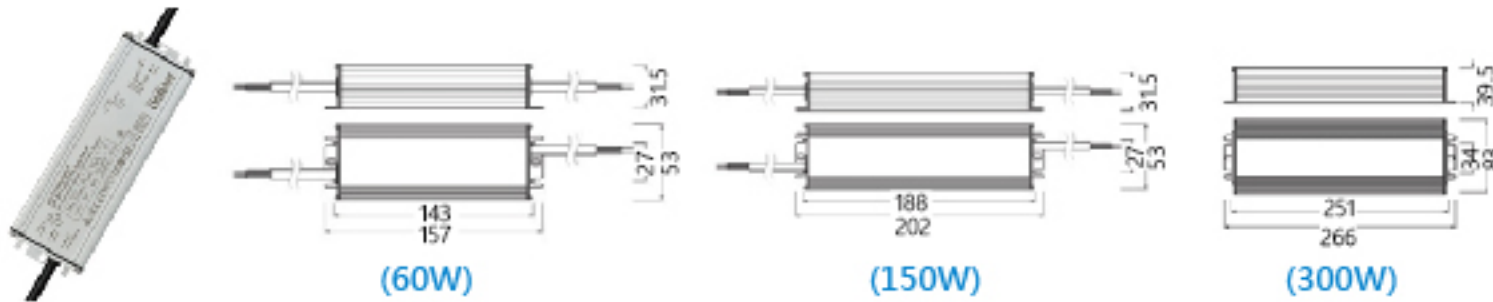

規格 Specification

- OSRAM電源供應器
- 防水型，戶外使用
- 防水系數:IP67


- OSRAM power supply
- Waterproof
- IP67

OSRAM
LEDs &
LED Driver
Included

特性 Order Information

Part No.	Dimension (mm)	Output power(W)	Output voltage (V)	Input voltage (V)
R-OT FIT 60	157x31.5x27	60	12.5	AC220V
R-OT FIT 150	202x31.5x27	150	12.5	AC220V
R-OT FIT 300	266x39.5x34	300	12.5	AC220V

尺寸圖 Dimension

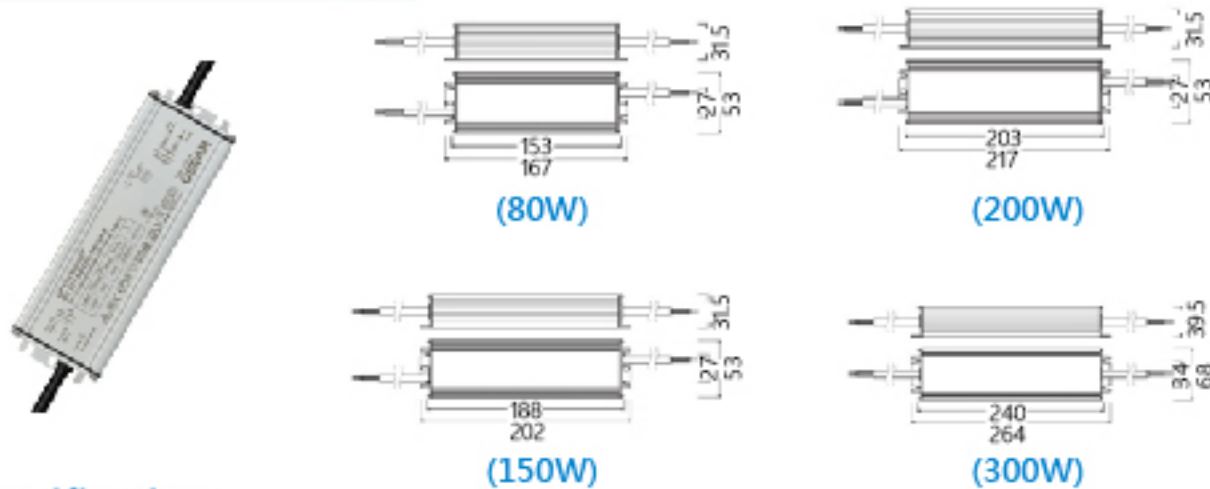

規格 Specification

- OSRAM電源供應器
- 防水型，戶外使用
- 防水系數:IP67


- OSRAM power supply
- Waterproof
- IP67

OSRAM
LEDs &
LED Driver
Included

特性 Order Information

Part No.	Dimension (mm)	Output power(W)	Output voltage (V)	Input voltage (V)
R-OT FIT 80	170x53x31.5	80	24V	AC220V
R-OT FIT 150	240x53x31.5	150	24V	AC220V
R-OT FIT 200	210x53x31.5	200	24V	AC220V
R-OT FIT 300	260x68x39.6	300	24V	AC220V

尺寸圖 Dimension

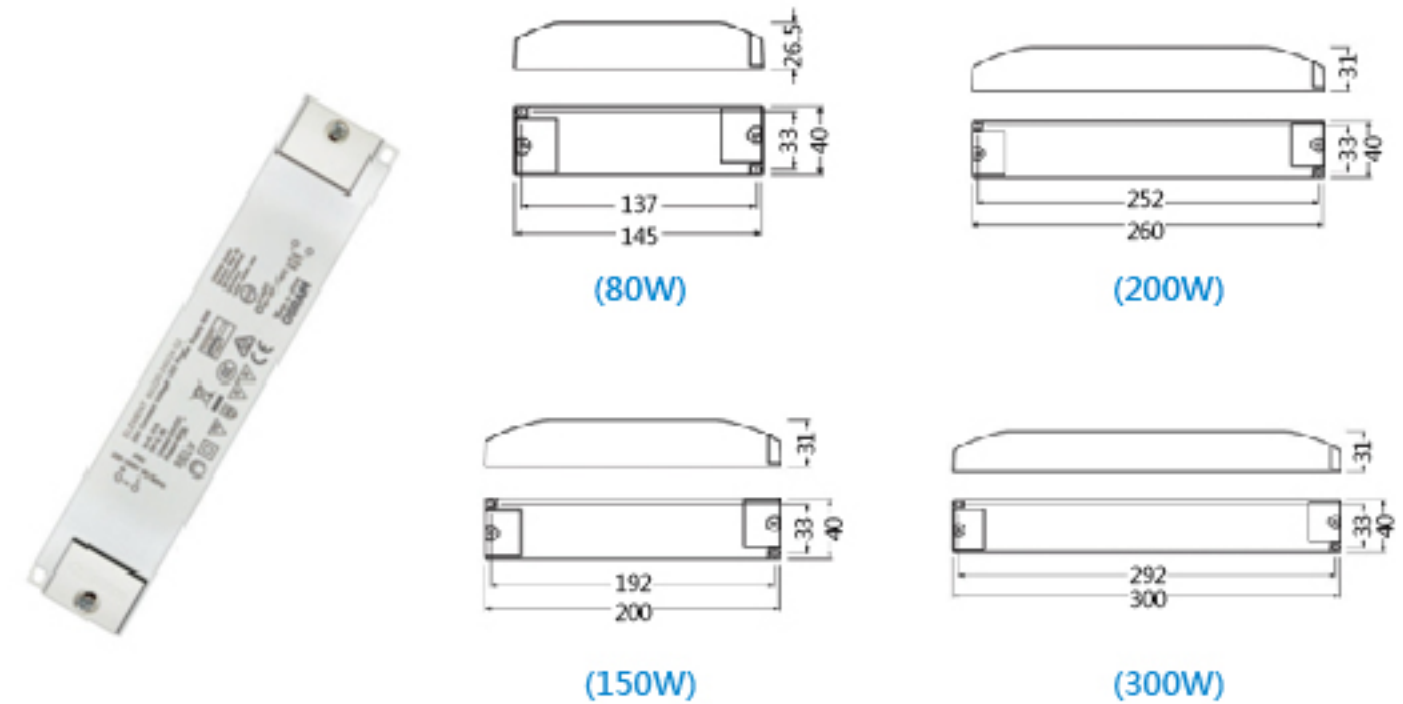

規格 Specification

- OSRAM電源供應器
- 防水型，戶外使用
- 防水系數:IP67

- OSRAM power supply
- Waterproof
- IP67

OSRAM
LEDs &
LED Driver
Included


特性 Order Information

Part No.	Dimension (mm)	Output power(W)	Output voltage (V)	Input voltage (V)
R-OT FIT 80	170x53x31.5	80	24V	AC220V
R-OT FIT 150	240x53x31.5	150	24V	AC220V
R-OT FIT 200	210x53x31.5	200	24V	AC220V
R-OT FIT 300	260x68x39.6	300	24V	AC220V

LED DIMMER SERIES

CONTROLLER

尺寸圖 Dimension

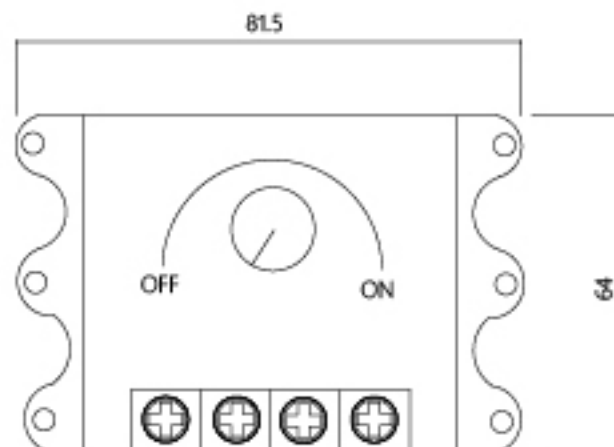


規格 Specification

- LED調光器
- 可調PMV頻率
- 可調調光曲線
- LED DIMMER
- Adjustable PMV frequency
- Dimmable curve

特性 Order Information




Part No.	Dimension (mm)	Working Current	Output Wattage	Input Voltage
RL-DM-30A	81.5x64x40	30A	DC12V-240W/DC24V-480W	DC12V/DC24V

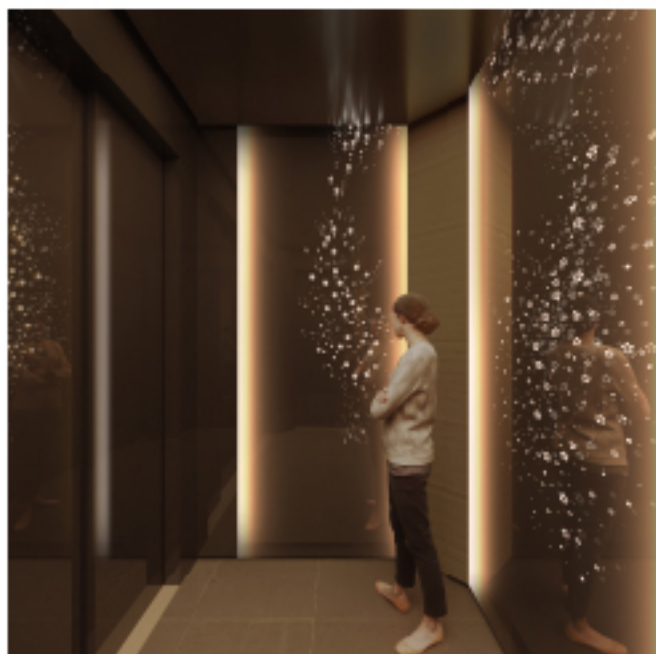


DALI SERIES

CONTROLLER

尺寸圖 Dimension

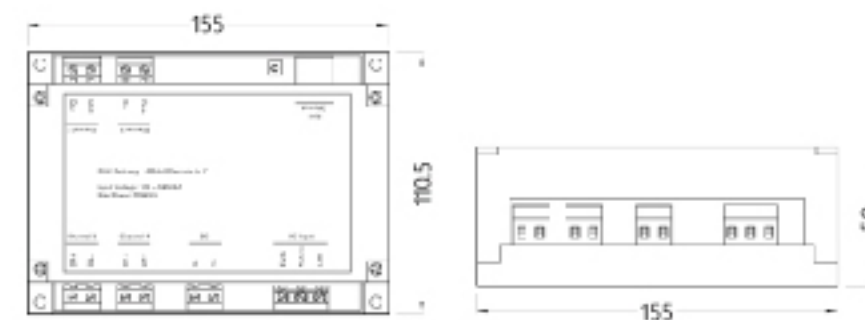

配線圖 Wiring Diagram

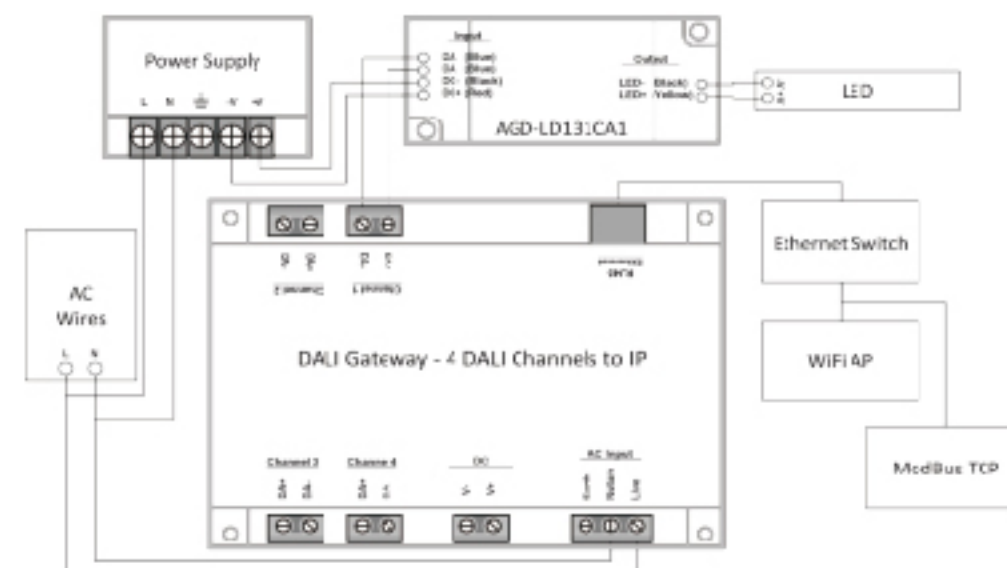

規格 Specification

- DALI主控
- AC110~220V輸入,內建UL認證35W POWER
- 通訊:Ethernet/Rj45 Port,支援DHCP,ModBus TCP
- 符合全球安全規範
- 可加放大器,增加負載
- 另支援iPhone和Android調光APP
- DALI Controller
- AC110~220V Input, Built-in UL certified 35W Power
- Support Ethernet/Rj45 Port. And DHCP. ModBus TCP
- Conforms to global safety regulations
- Amplifier can be added to increase the load
- Free iPhone and Android dimmer APP

特性 Order Information




Part No.	Dimension (mm)	DALI Output	Rated Power	Input Voltage
RDC-MA224DA2	155x110.5	4 Channel	35W	AC110~220V
RDC-MD221DB1	155x110.5	1 Channel	5W	AC110~220V

尺寸圖 Dimension



配線圖 Wiring Diagram

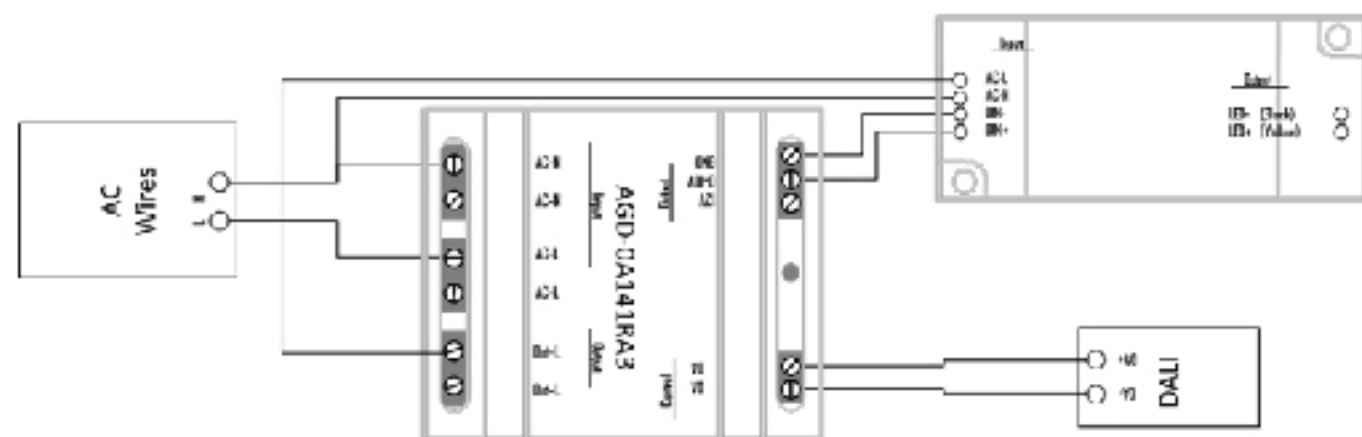

規格 Specification


- DALI繼電器
- DALI-2 數位調光介面
- 內含繼電器，最大輸出 10A
- 提供多種接線方法，搭配電流感應保護
- 保護機制
- DALI Relay
- DALI-2 Digital Dimming Interface
- Built-in relay, maximum output 10A
- Provides a variety of wiring methods, with current sensing protection
- Protect system

特性 Order Information


Part No.	Dimension (mm)	MAX AC Current	Output Voltage(V)	MAX Watt
RDR-0A141RA1	73x87x60	10A	AC110~220V	1100W/2200W



尺寸圖 Dimension

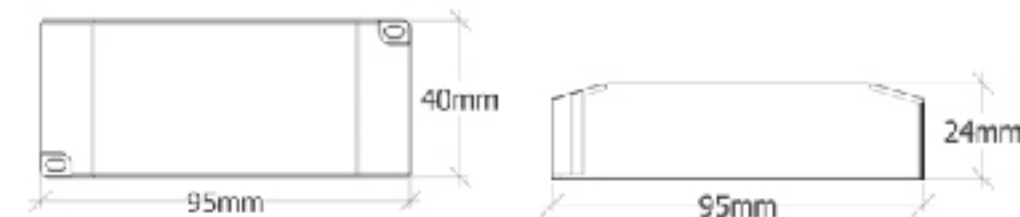

配線圖 Wiring Diagram

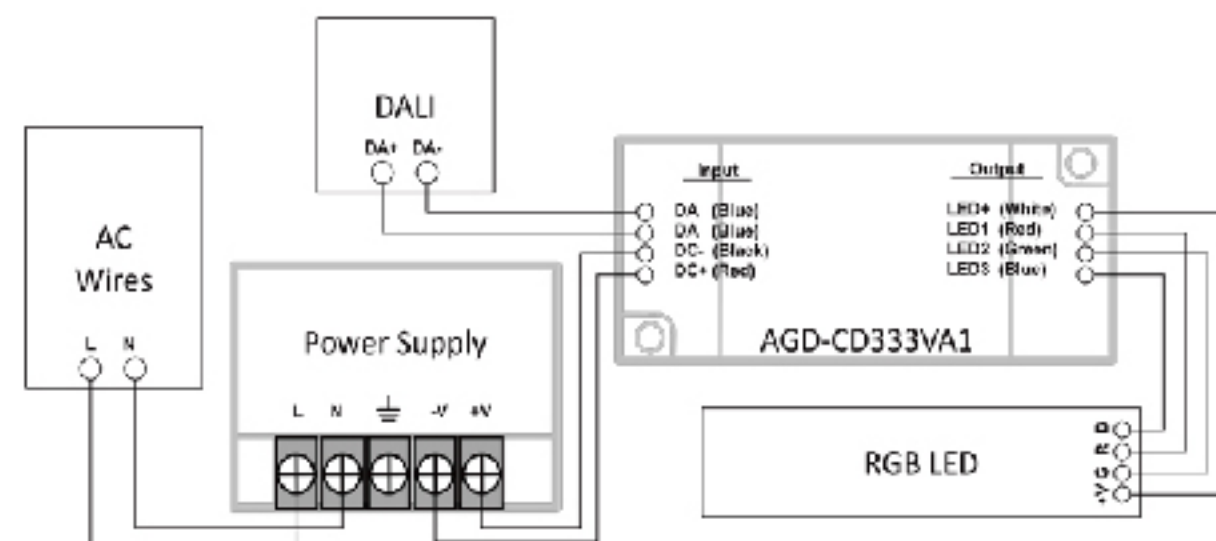

規格 Specification


- DALI 定電壓RGB驅動器
- 輸入DC12V~DC24V
- 最大輸出 9A
- 可偵測負載變化
- DALI 數位調光介面，IEC 62384-102、207、209
- DALI Constant voltage RGB LED driver
- Input: DC12V~24V
- MAX Output current:9A
- Detectable load changes
- DALI digital dimming interface, IEC 62384-102、207、209

特性 Order Information


Part No.	Dimension (mm)	Maximum Current	Input Voltage	MAX Watt
RDP-CD333VA1	95x40x24	9A	DC12V/DC24V	108W/216W



尺寸圖 Dimension

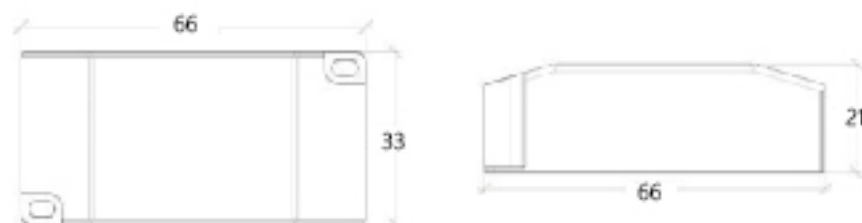

配線圖 Wiring Diagram

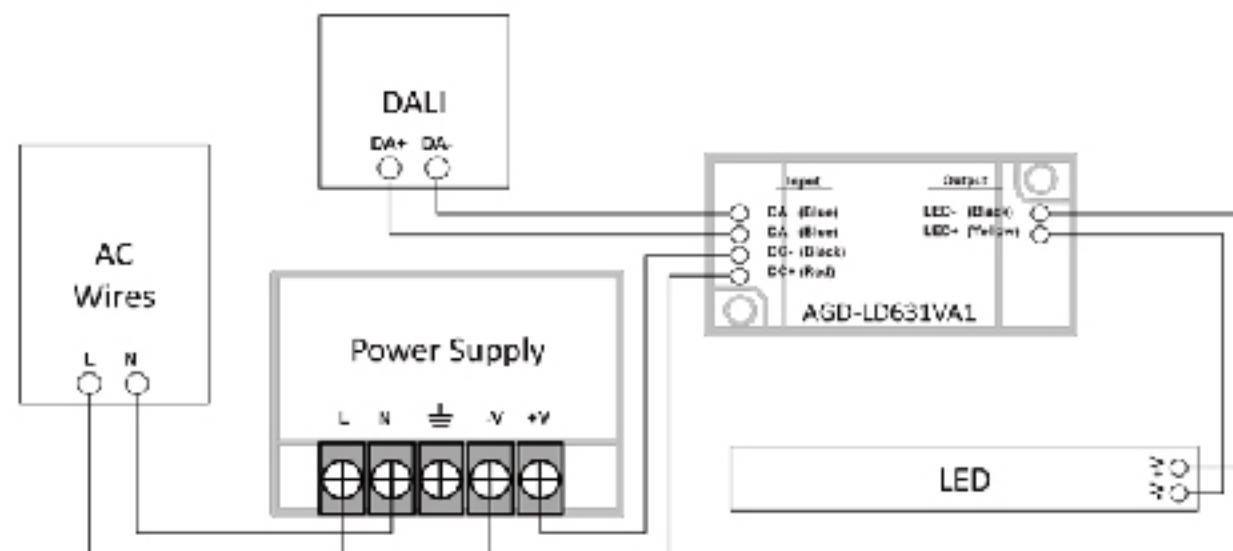

規格 Specification


- DALI 定電壓驅動器
- 輸入DC12V/DC24V共用
- 最大輸出6A
- 可讀取輸出電流與輸入電壓
- DALI數位調光介面, IEC62386-102, 207
- PWM調光輸出模式
- DALI Constant voltage LED driver
- Input: DC12V~24V are available
- Maximum output: 6A
- Able to read output current and input voltage
- DALI digital dimming interface, IEC 62384-102, 207
- PWM dimmer output

特性 Order Information


Part No.	Dimension (mm)	Maximum Current	Input Voltage(V)	MAX Watt
RDP-LD631VA1	66x33x21	6A	DC12V/DC24V	72W/144W



尺寸圖 Dimension

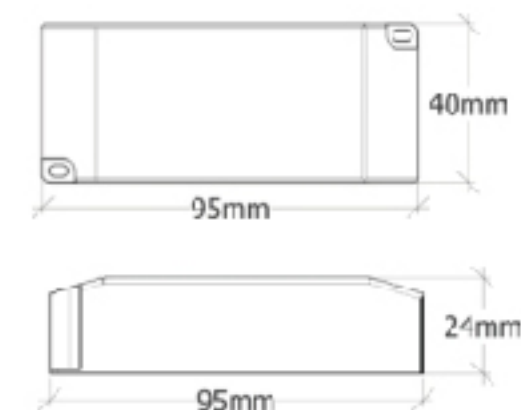

配線圖 Wiring Diagram

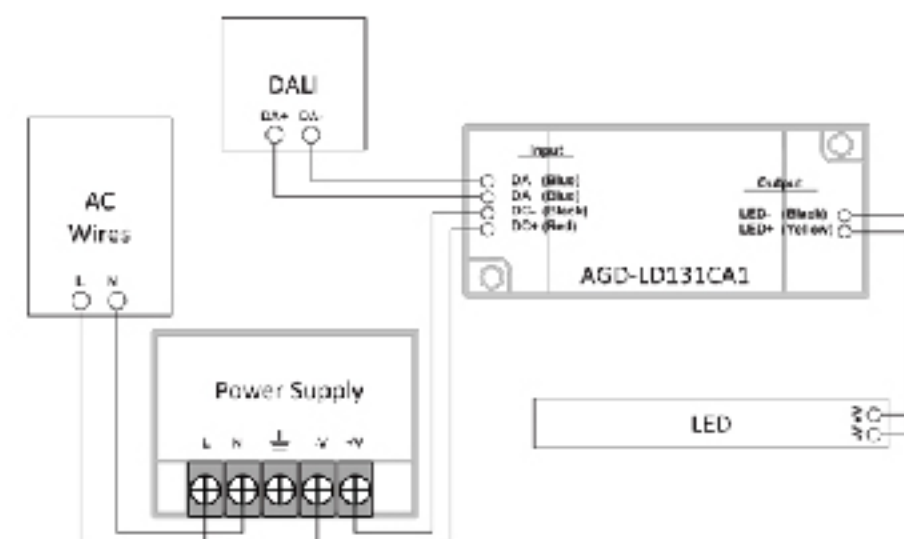

規格 Specification


- DALI 定電流驅動器
- 輸入DC12V~DC48V
- 輸入電流:100MA~1A
- DALI數位調光介面, IEC62386-102, 207
- 保護機制
- DALI Constant current LED driver
- Input: DC12V~48V
- Input current:100MA~1A
- DALI digital dimming interface, IEC 62384-102, 207
- Protect system

特性 Order Information

Part No.	Dimension (mm)	Output Current	Output power
RDP-LD131CA1	95x40x24	1A	40W
RDP-LD521CA1	95x40x24	0.5A	25W




尺寸圖 Dimension

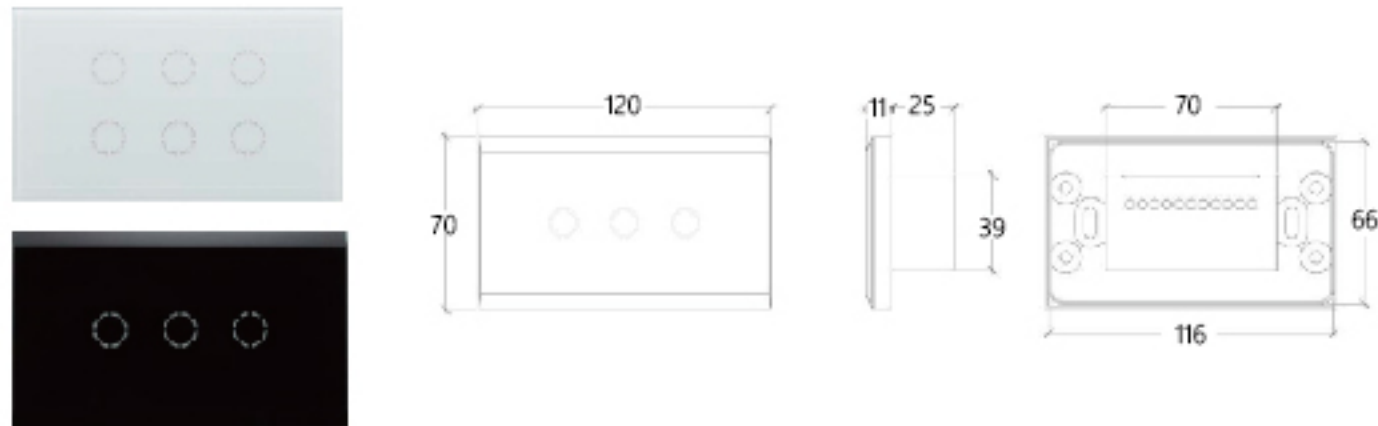


配線圖 Wiring Diagram


AGD-WAD0_CB2

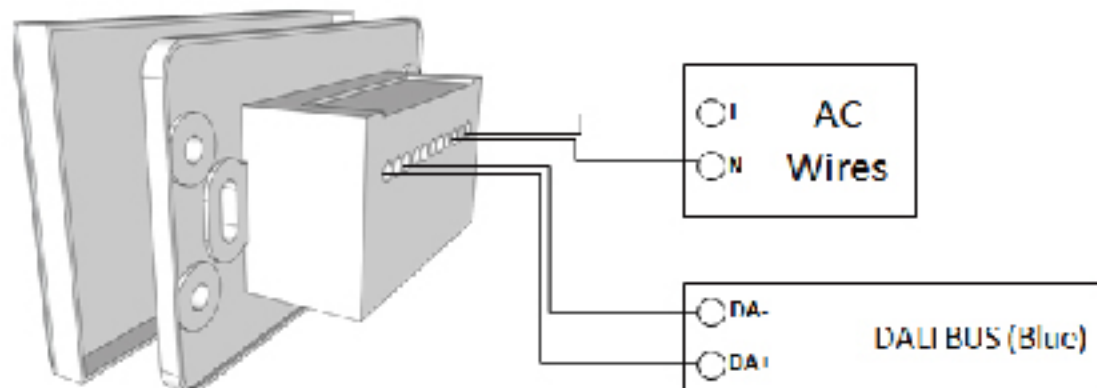

AGD-WDD0_CB2

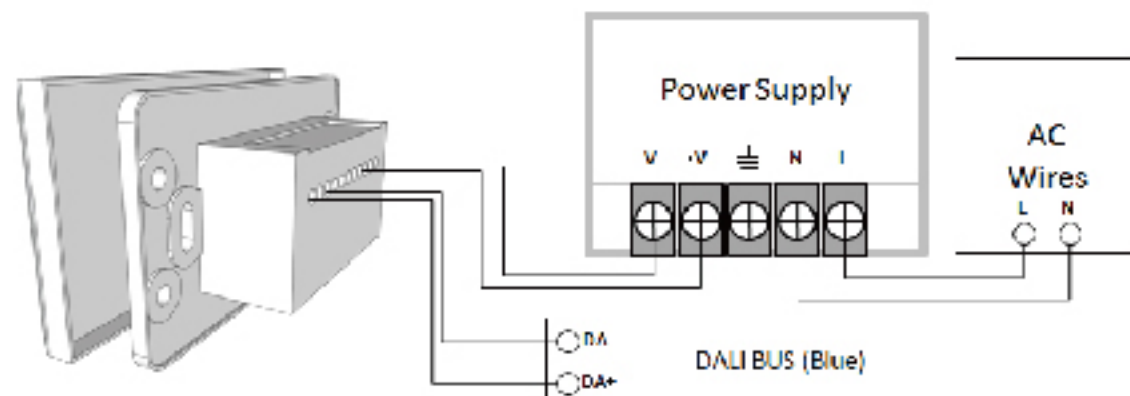

AGD-WBD0_CB2

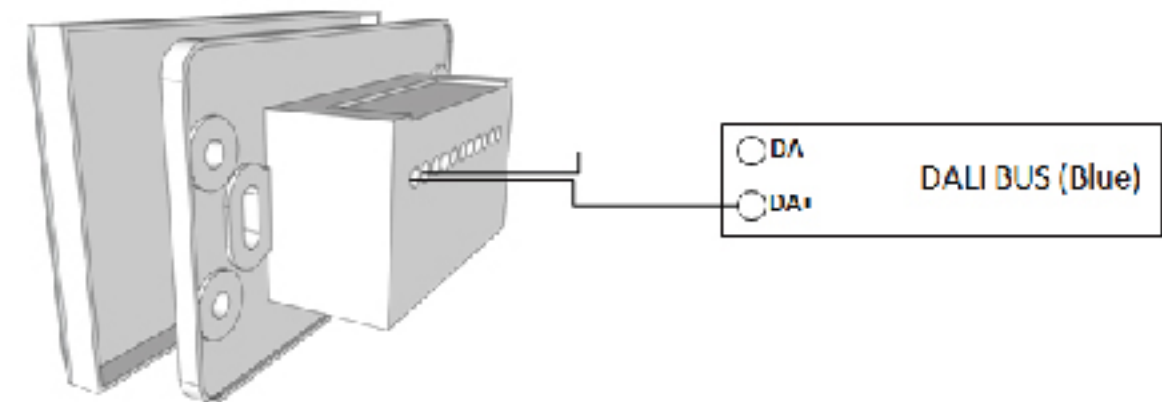


規格 Specification

- DALI 觸控面板-美規
- 可編程應用控制器
- 可訂製版面
- DALI數位調光介面, IEC62386-103,301
- 雙向開關(按鍵數1~6), 7色指示燈
- DALI touch panel
- Programmable application
- Customizable layout
- DALI digital dimming interface, IEC 62384-103,301
- Two way switch(button1~6), 7 color indicator


特性 Order Information




Part No.	Dimension (mm)	Input Source	Input Current
RDT-WAD0CB2	120x70x36	AC110~240V	4~10mA
RDT-WDD0CB2	120x70x36	DC12V~48V	4~30mA
RDT-WBD0CB2	120x70x36	DALI BUS	4~30mA

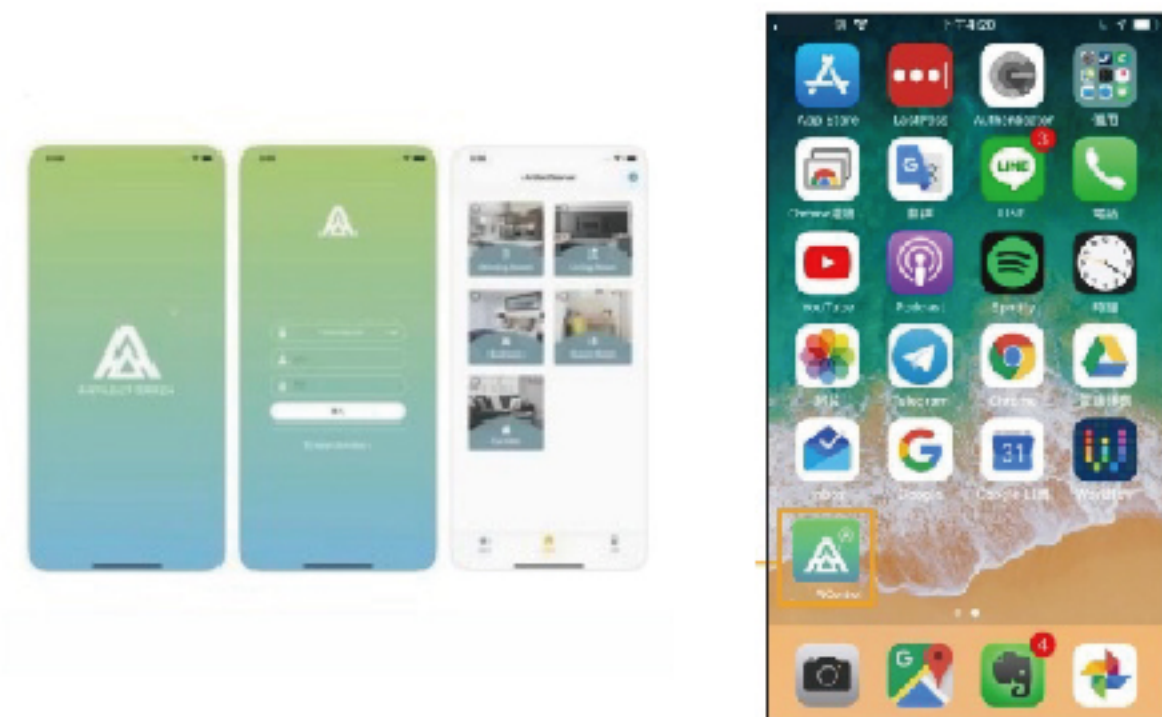

尺寸圖 Dimension

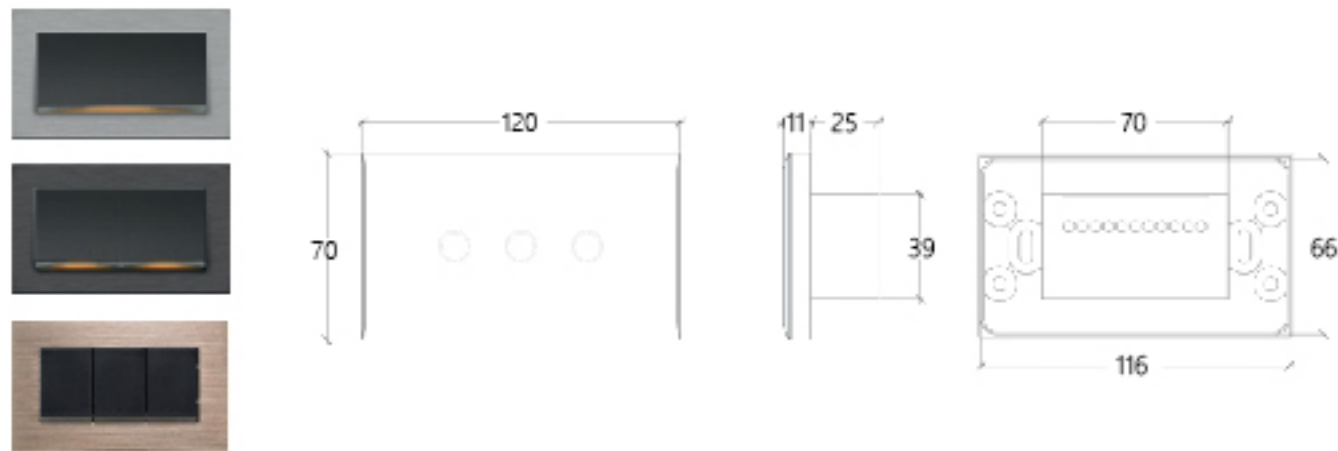

配線圖 Wiring Diagram

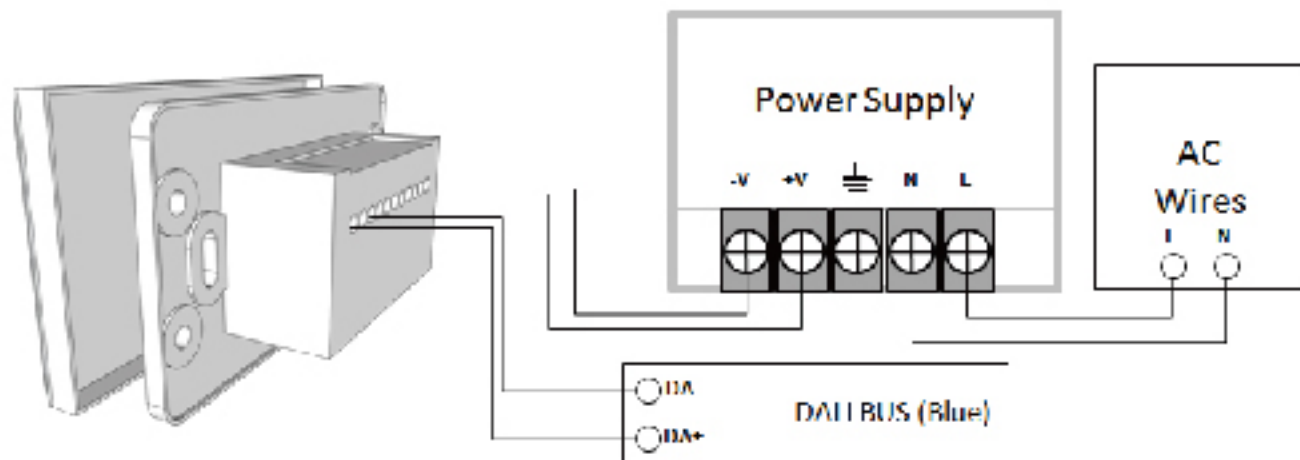

規格 Specification

- DALI 壁面開關
- 輸入DC12V~DC48V
- 3組按鈕,內含可變色指示燈
- DALI數位調光介面,IEC62386-103
- 具雙切/多切功能
- DALI wall switch
- Input: DC12V~48V
- 3 sets of buttons including variable color indicator lights
- DALI digital dimming interface, IEC 62384-103
- Double switching and multi switching function

特性 Order Information

Part No.	Dimension (mm)	Input Voltage	Consume
RDW-WD013TB1	120x70x36	DC12V~DC48V	6~40mA
RDW-WB013TB1	120x70x36	DALI BUS	6~40mA



智能系統

特色

- 採用DALI數位調光標準 IEC 62386-103, 供國際大廠採用
- 國際調光, 調光平滑且快
- 系統安全
- 整合性高

功能

- 可透過遙控器或手機APP控制
- 可同時控制多個系統控制
- 透過遙控器可達白晝控制
- 透過遙控器可達白晝控制
- 透過遙控器可達白晝控制
- 透過遙控器可達白晝控制
- 透過遙控器可達白晝控制

可整合控制項目

- LED燈(單色、彩色、動態、靜態)
- 調光器(單色、彩色、動態、靜態)
- 調光器(單色、彩色、動態、靜態)
- 調光器(單色、彩色、動態、靜態)
- 調光器(單色、彩色、動態、靜態)
- 調光器(單色、彩色、動態、靜態)
- 調光器(單色、彩色、動態、靜態)
- 調光器(單色、彩色、動態、靜態)

App Control

Commercial Space Building facades lighting

飯店、建築、商務應用特色


- 外觀燈光重色感彩色動態變化
- 飯店建築外觀、燈光狀態隨時調整
- 可完全取代二層玻璃窗
- 低功耗系統, 符合綠建築
- 整合系統功能完整

Home

住宅應用特色

- 靜音調光, 無任何噪音
- 調光不閃爍, 保護視力
- 調光系統可隨時調整
- 燈光狀態隨時調整立即省電
- 安裝完成後, 透過遙控器即可調整
- 不須再安裝任何線路
- 系統穩定, 操作簡單

尺寸 Dimension

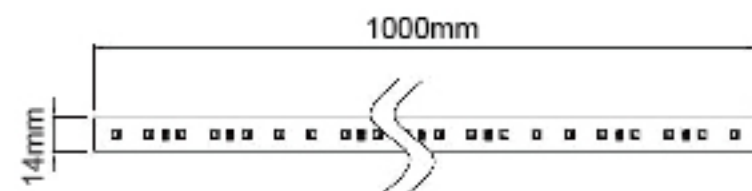

規格 Specification


- 台製5050 LED, CRI 80以上。
- FPC電路板。
- 矽膠套管。
- 輸入可選擇DC12V 或DC24V。
- SMD 5050, made in Taiwan, CRI>80
- FPC Flexible Circuit
- Silica gel
- DC12V or DC24V Available

特性 Order Information
FLEXIBLE SMD5050 LINEAR

Part No.	Dimension (mm)	LED Quantity	Watt (W)	Voltage (V)	Beam Angle	Color
RL-F100/60-3528	1000x14x4	3528x60	5	DC12V	120°	CW/NW/WW/Y
RL-F100/120-3528	1000x14x4	3528x120	8	DC12V	120°	CW/NW/WW/Y
RL-F100/WH30	1000x14x4	5050x30	8	DC12V	120°	CW/NW/WW/Y/RGB
RL-F100/WH60	1000x14x4	5050x60	15	DC12V	120°	CW/NW/WW/Y/RGB
RL-F100/WH2835	1000x14x4	2835x60	25	DC12V	120°	CW/NW/WW/Y
RL-F100/T120	100x12.5x5	5050x60x2	30	DC24V	120°	CW/NW/WW/Y
RL-F100/T3014	100x10.5x5	3014x60	5	DC24V	120°	CW/NW/WW/Y



尺寸 Dimension

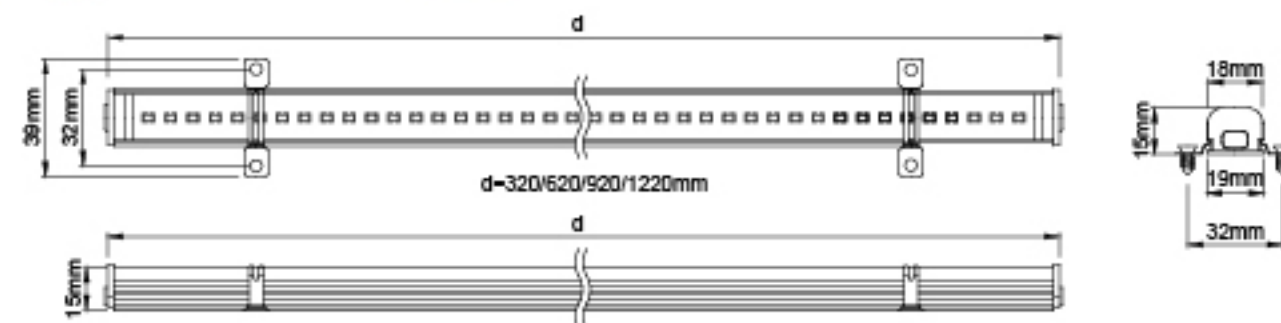


規格 Specification

- 台製SMD, CRI 80以上。
- 防塵透明工程塑膠材質燈體。
- 輸入電壓AC110V 或AC220V。
- 荷附高黏性雙面膠
- T5固定架。
- SMD LED, made in Taiwan, CRI>80
- UV/ Dust Resisted & Optics Lamp Body
- AC110V or AC220V Input
- High Quality Back Adhesive
- T5 bracket.

特性 Order Information
SMD 3014 LINEAR

Part No.	Dimension (mm)	LED Quantity	Watt (W)	Voltage (V)	Beam Angle	Color
RL-P30/AC40	320x17x15	3014x40	5	AC110V or AC220V	120°	CW/NW/WW
RL-P60/AC80	620x19x15	3014x80	10	AC110V or AC220V	120°	CW/NW/WW
RL-P90/AC120	920x19x15	3014x120	15	AC110V or AC220V	120°	CW/NW/WW
RL-P120/AC160	1220x19x15	3014x160	20	AC110V or AC220V	120°	CW/NW/WW
RL-P150/AC200	1520x19x15	3014x200	25	AC110V or AC220V	120°	CW/NW/WW

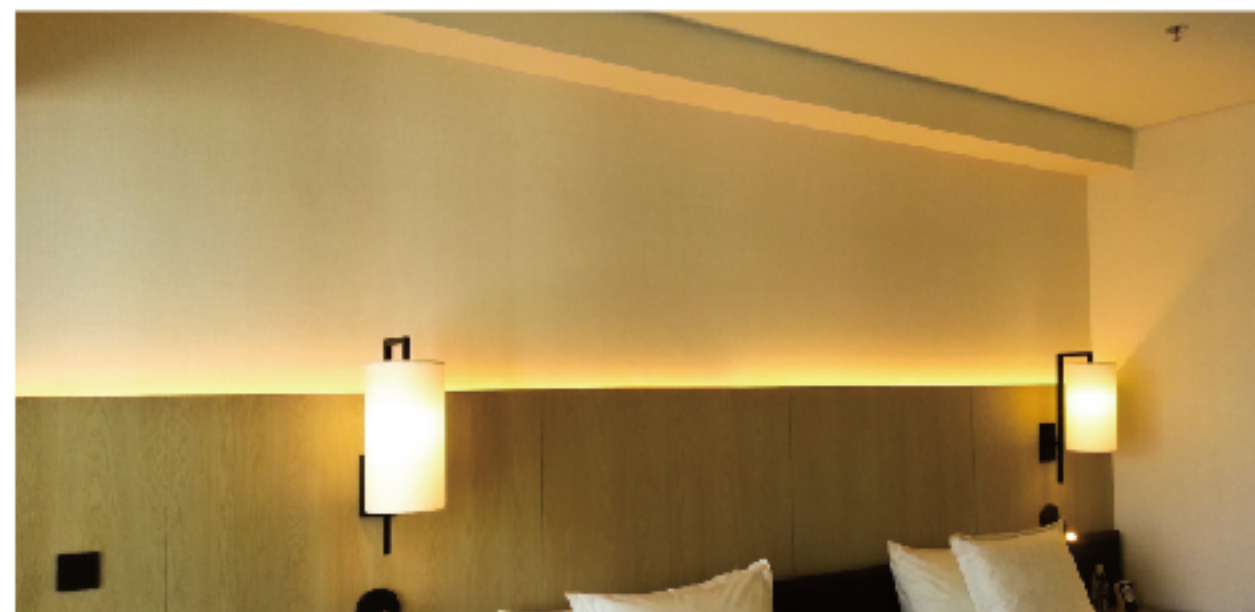

SMD LINEAR SERIES

COMMERCIAL LIGHTING

尺寸圖 Dimension



規格 Specification


- 台製SMD CRI 80以上
- 鋁擠成型,陽極處理
- 45度 投射效果
- 防塵透明工程塑膠材質面蓋
- 輸入電壓DC 12V
- 不銹鋼固定架
- SMD LED, made in Taiwan, CRI>80
- Extruded and Anodized Aluminum Housing
- 45 Degree Beam Angle
- UV/ Dust Resisted & Optics PC Diffuser
- DC 12V Input
- Stainless steel bracket

特性 Order Information

TRIANGLE LINEAR




Part No.	Dimension (mm)	LED Quantity	Watt (W)	Voltage (V)	Beam Angle	Color
RL-T100/S30-3528	1000x16x16	3528x60	4	DC12V	120°	CW/NW/WW
RL-T100/60-3528	1000x16x16	3528x120	8	DC12V	120°	CW/NW/WW
RL-T100/60-2835	1000x16x16	2835x60	20	DC12V	120°	CW/NW/WW
RL-T100/WH30	1000x16x16	5050x30	8	DC12V	120°	CW/NW/WW/Y/RGB
RL-T100/WH60	1000x16x16	5050x60	15	DC12V	120°	CW/NW/WW/Y/RGB

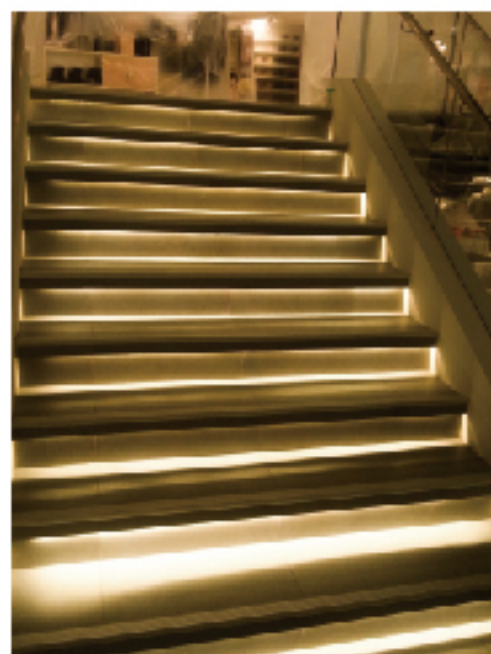

SMD LINEAR SERIES

FACTORY LIGHTING

尺寸圖 Dimension

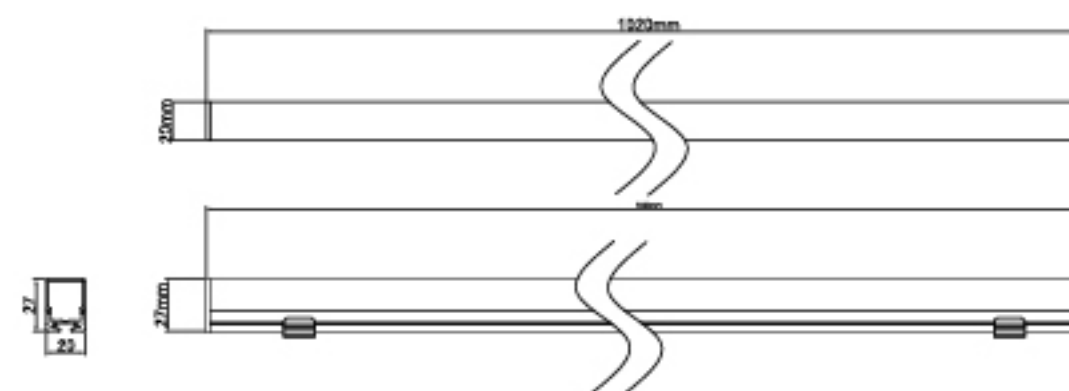

規格 Specification


- 台製SMD, CRI 80以上
- 鋁擠成型,陽極處理
- 可雙色溫調光
- 防塵透明工程塑膠材質面蓋
- 輸入電壓DC 24V
- 不銹鋼固定架
- SMD LED, made in Taiwan, CRI>80
- Extruded and Anodized Aluminum Housing
- Two Color Dimmer Available
- UV/ Dust Resisted & Optics PC Diffuser
- DC 24V Input
- Stainless steel bracket

特性 Order Information

SMD 5050 LINEAR




Part No.	Dimension (mm)	LED Quantity	Watt (W)	Voltage (V)	Beam Angle	Color
RL-H30/S12	300x17x10	2835x18x2	4	DC24V	120°	CW+WW
RL-H60/S24	600x17x10	2835x36x2	8	DC24V	120°	CW+WW
RL-H90/S36	900x17x10	2835x54x2	12	DC24V	120°	CW+WW
RL-H120/S48	1200x17x10	2835x72x2	16	DC24V	120°	CW+WW

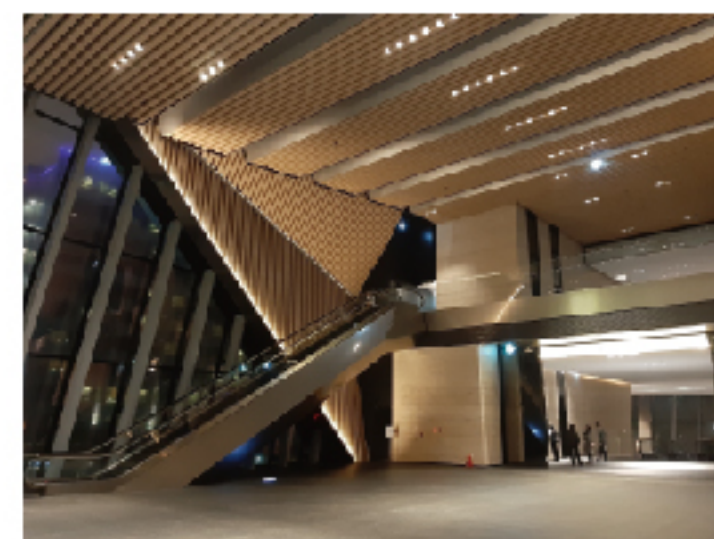




RL-1616



- W16 x H16 (mm)
- 最長三米 · PC罩有方形較半圓款
- 可搭配全系列LED燈帶




RL-2515



- W24.5 x H15 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-1816



- W17.5 x H15.5 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-10032



- W100 x H32 (mm)
- 最長三米
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶



RL-5032



- W50 x H32 (mm)
- 最長三米
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶




RL-3010



- W30 x H10 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-2020



- W19.8 x H20 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-1408



- W13.2 x H7.85 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-1515



- W14.5 x H14.4 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-0809



- W7.7 x H9 (mm)
- 最長三米
- 可搭配超薄系列LED燈帶




RL-5050



- W50 x H50 (mm)
- 最長三米
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶




RL-3030



- W29.7 x H29.7 (mm)
- 最長三米
- PC罩有方形較半圓款
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶




RL-0812




- W8 x H12 (mm)
- 最長二米
- 可搭配全系列LED燈帶




RL-2411




- W23.4 x H10.7 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-3909




- W39 x H8.8 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-3535



- W35 x H35 (mm)
- 最長三米
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶




RL-U5050



- W50 x H50 (mm)
- 最長三米
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶




RL-3545




- W35 x H45 (mm)
- 最長三米
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶



RL-7535




- W75 x H35 (mm)
- 最長三米
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶



RL-5475



- W54 x H75 (mm)
- 最長三米
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶



RL-5070



- W50 x H70 (mm)
- 最長三米
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶



RL-1010



- W10 x H10 (mm)
- 最長三米
- PC罩有方形較半圓款
- 可搭配超薄系列LED燈帶



RL-1932



- W18.8 x H31.6 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-32



- Ø32 (mm)
- 最長三米
- 鋁條單隻1.5米以上有附吊線
- 可搭配全系列LED燈帶




RL-3020



- W30 x H20 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-1013



- W10 x H12.5 (mm)
- 最長三米
- 可搭配3528及超薄系列LED燈帶




RL-1309



- W12.7 x H9 (mm)
- 最長三米
- 可搭配超薄系列LED燈帶




RL-21



- Ø20.4 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-1712



- W16.9 x H11.7 (mm)
- 最長三米
- 可搭配全系列LED燈帶




RL-2012



- W20 x H12 (mm)
- 最長三米
- 可搭配全系列LED燈帶

尺寸 Dimension

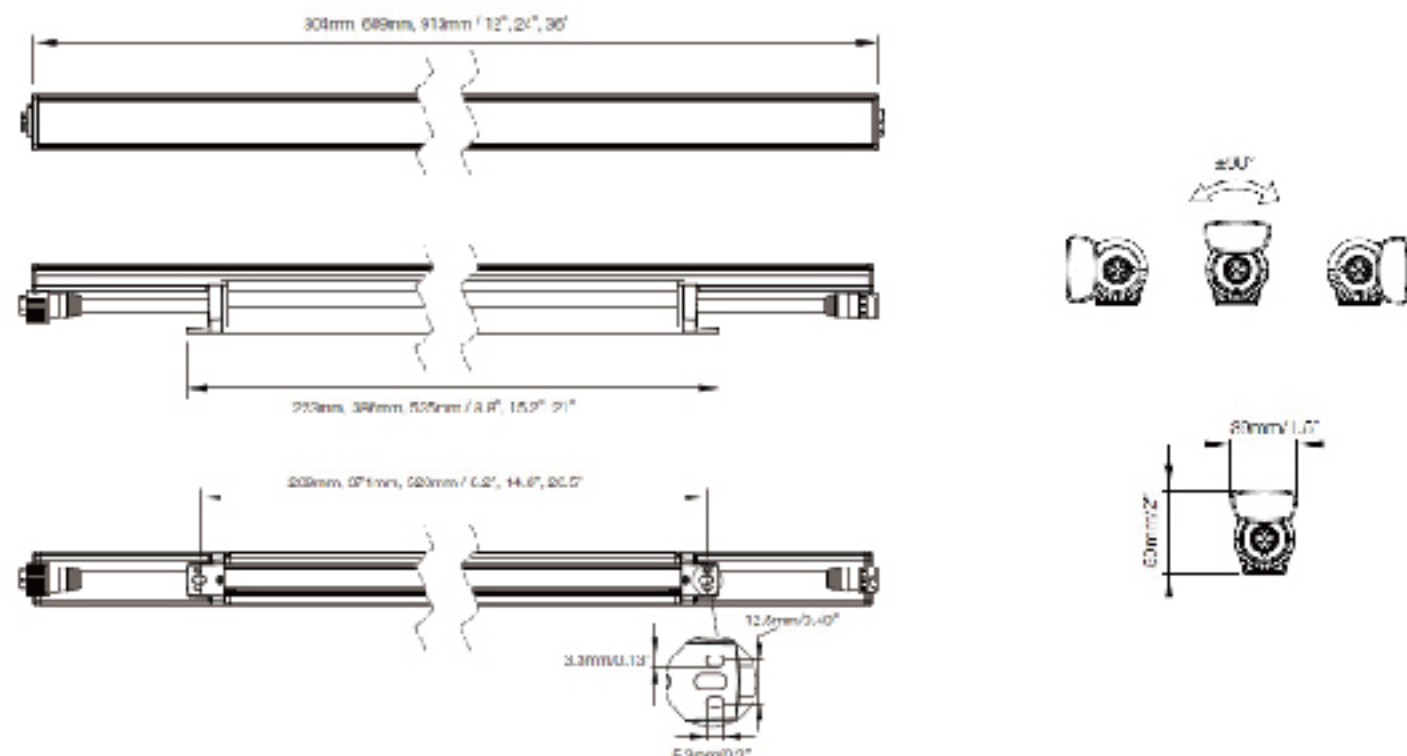

規格 Specification

- OSRAM 光源可供選擇
- 鋁擠成型 陽極處理
- 抗UV防塵光學擴散PC罩
- 輸入電壓AC110~220V
- 標準DMX512相容介面
- 操作溫度-10°~40°
- IP20防護等級
- 可調角度 固定座
- OSRAM LED Light Source Available
- Extruded and Anodized Aluminum Housing
- UV/ Dust Resisted & Optics PC Diffuser
- AC110~220V Input
- Standard DMX512 Interface
- Environment: -10°~40°
- IP20
- Adjustable Hanging bracket

特性 Order Information


HIGH POWER WATERPROOF LINEAR



Part No.	Dimension (mm)	LED Quantity	Watt (W)	Voltage (V)	Beam Angle	Color
RL-S30/MH06	304x39x50	4 in1x6	11	AC110~220V	120°	RGBW
RL-S60/MH12	609x39x50	4 in1x12	22	AC110~220V	120°	RGBW
RL-S90/MH18	913x39x50	4 in1x18	33	AC110~220V	120°	RGBW



尺寸 Dimension

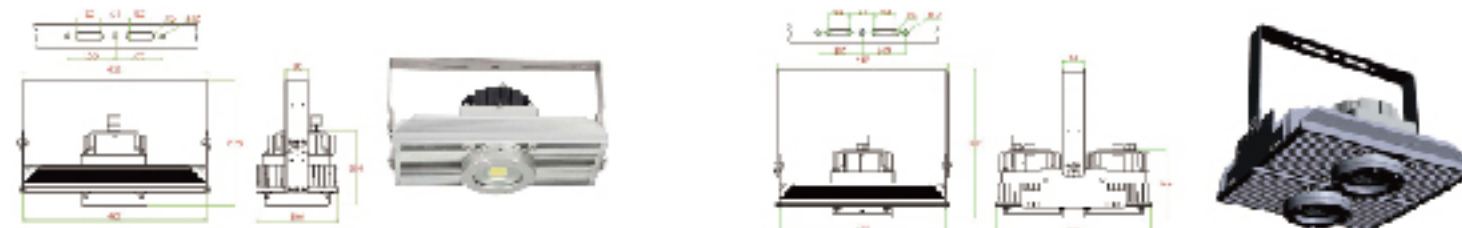


規格 Specification

- 集成封裝COB光源
- 鋁壓鑄燈具本體
- 防護等級：IP65
- 可調角度固定架
- 可安裝位置電源盒
- COB LED Light Source
- Diecasting Aluminum Lamp Body
- IP65
- Adjustable Hanging Bracket
- LED Driver Case available

特性 Order Information

Part No.	Dimension (mm)	Watt (W)	Voltage (V)	Beam Angle	Color
RAX-60W	412x180x276	60	AC100~240V	120°	CW/NW/WW
RAX-80W	412x180x276	80	AC100~240V	120°	CW/NW/WW
RAX-100W	412x180x276	100	AC100~240V	120°	CW/NW/WW
RAX-120W	412x180x276	120	AC100~240V	120°	CW/NW/WW
RAX-160W	412x180x276	160	AC100~240V	120°	CW/NW/WW
RAX-200W	412x180x276	200	AC100~240V	120°	CW/NW/WW

尺寸 Dimension

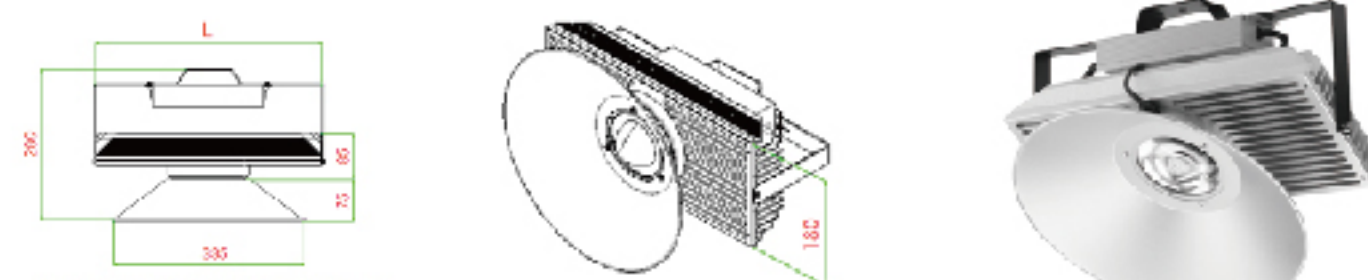

規格 Specification

- 集成封裝COB光源
- 鋁壓鑄燈具本體
- 防護等級：IP68
- 可調角度固定架
- 可安裝位置電源盒
- COB LED Light Source
- Diecasting Aluminum Lamp Body
- IP68
- Adjustable Hanging Bracket
- LED Driver Case available

特性 Order Information


Part No.	Dimension (mm)	Watt (W)	Voltage (V)	Beam Angle	Color
RHB-40W	240x180x85	40	AC100~240V	8°/15°/60°/95°/120°/100°x130°	CW/NW/WW/Y
RHB-60W	240x180x85	60	AC100~240V	8°/15°/60°/95°/120°/100°x130°	CW/NW/WW/Y
RHB-80W	240x180x85	80	AC100~240V	8°/15°/60°/95°/120°/100°x130°	CW/NW/WW/Y
RHB-100W	330x180x85	100	AC100~240V	8°/15°/60°/95°/120°/100°x130°	CW/NW/WW/Y
RHB-120W	330x180x85	120	AC100~240V	8°/15°/60°/95°/120°/100°x130°	CW/NW/WW/Y
RHB-150W	330x180x85	150	AC100~240V	8°/15°/60°/95°/120°/100°x130°	CW/NW/WW/Y
RHB-180W	400x180x85	180	AC100~240V	8°/15°/60°/95°/120°/100°x130°	CW/NW/WW/Y
RHB-200W	400x180x85	200	AC100~240V	8°/15°/60°/95°/120°/100°x130°	CW/NW/WW/Y
RHB-250W	400x180x85	250	AC100~240V	8°/15°/60°/95°/120°/100°x130°	CW/NW/WW/Y



HIGH BAY LIGHTING SERIES

COMMERCIAL LIGHTING

尺寸圖 Dimension

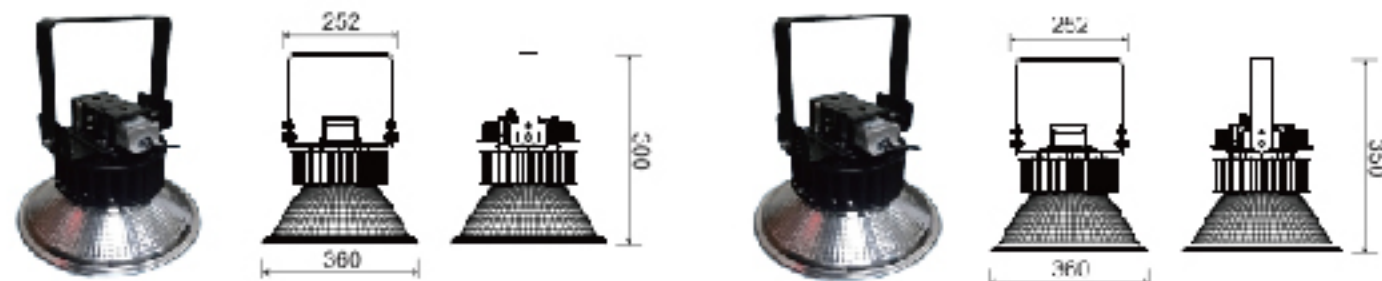

(RS-GKL-50)

(RS-GKL-100)

規格 Specification

- Lumileds或台製LED光源可供選擇。
- 鋁製散熱體。
- 鋁製反射罩。
- 燈具效率117LM/W
- 可另選配60度 鋁罩
- Lumileds or Taiwan LED Light Source Available
- Aluminum heat sink
- Aluminum reflector
- 117LM/W
- 60 Degree Lampshade Available

特性 Order Information

Part No.	Dimension (mm)	Watt (W)	Voltage (V)	Color
RS-GKL-50	360x300x252	50	AC110~220V	3000K/5000K
RS-GKL-100	360x50x252	100	AC110~220V	3000K/5000K

尺寸圖 Dimension



(RS-GKL-150)

(RS-GKL-200)

規格 Specification

- Lumileds或台製LED光源可供選擇。
- 鋁製散熱體。
- 鋁製反射罩。
- 燈具效率113LM/W
- 可另選配60度 鋁罩
- Lumileds or Taiwan LED Light Source Available
- Aluminum heat sink
- Aluminum reflector
- 113LM/W
- 60 Degree Lampshade Available


特性 Order Information

Part No.	Dimension (mm)	Watt (W)	Voltage (V)	Color
RS-GKL-150	360x390x252	150	AC110~220V	3000K/5000K
RS-GKL-200	360x435x252	200	AC110~220V	3000K/5000K

HIGH BAY LIGHTING SERIES

FACTORY LIGHTING

尺寸圖 Dimension

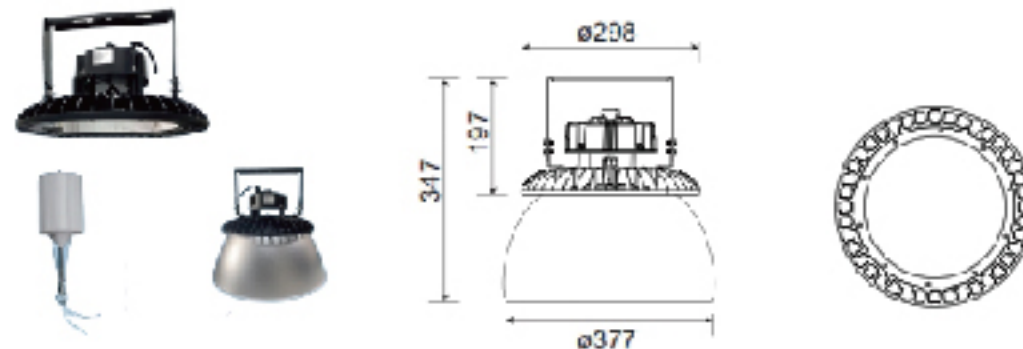


規格 Specification

- Lumileds光源。
- 鋁製散熱體。
- 耐熱強化玻璃。
- 演色性:Ra80
- Lumileds LED Light Source
- Aluminum heat sink
- Heat-resistant tempered glass
- color rendering:Ra80

特性 Order Information

Part No.	Dimension (mm)	Watt (W)	Voltage (V)	Beam Angle	Color
RS-HB08-100	Ø298xH179	100	AC110~220V	110°	5700K
RS-HB08-150	Ø298xH179	150	AC110~220V	110°	5700K

尺寸圖 Dimension

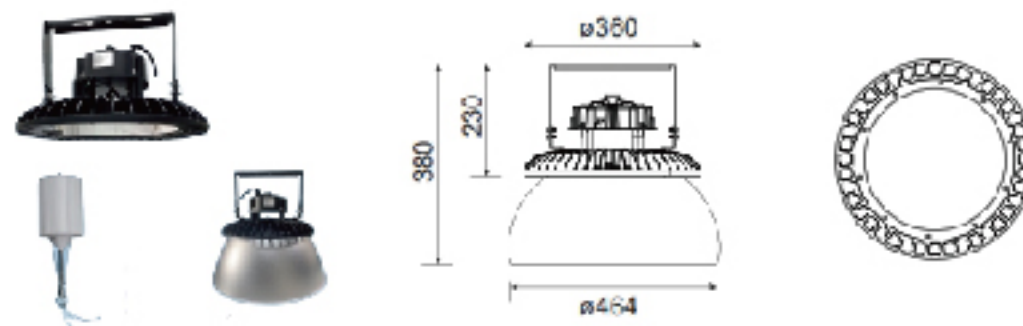

規格 Specification

- Lumileds光源。
- 鋁製散熱體。
- 耐熱強化玻璃。
- 演色性:Ra80
- Lumileds LED Light Source
- Aluminum heat sink
- Heat-resistant tempered glass
- color rendering:Ra80


特性 Order Information

Part No.	Dimension (mm)	Watt (W)	Voltage (V)	Beam Angle	Color
RS-HB08-200	Ø360x230	200	AC110~220V	110°	5700K
RS-HB08-240	Ø360x230	240	AC110~220V	110°	5700K

HIGH BAY LIGHTING SERIES

COMMERCIAL LIGHTING

尺寸圖 Dimension

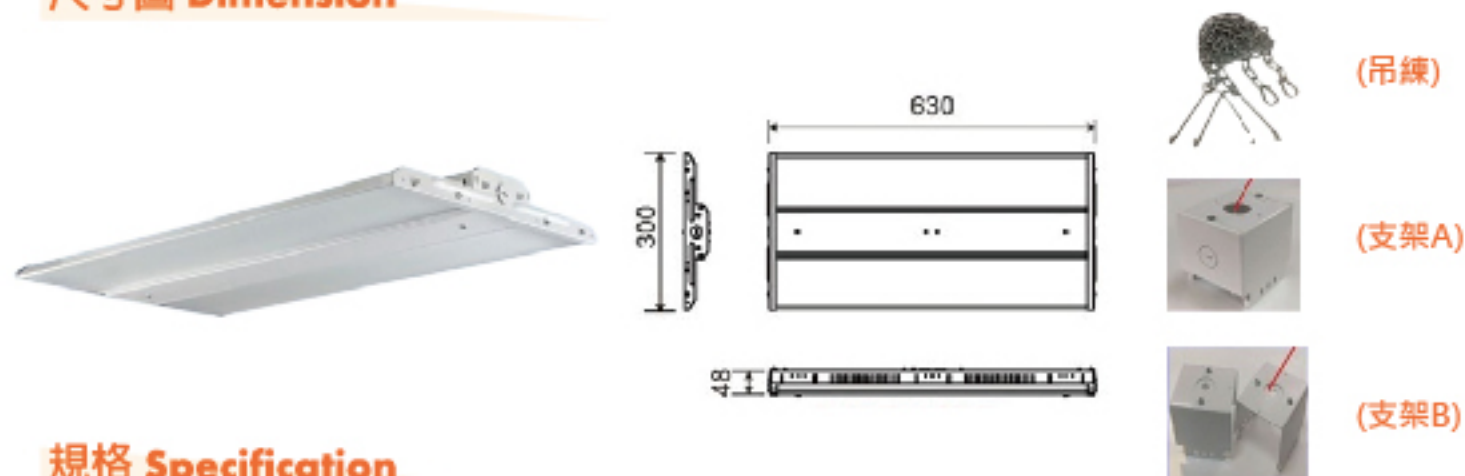


規格 Specification

- Lumileds光源。
- 鐵製燈體。
- 顆粒面PC罩。
- 鐵製吊鍊。
- 演色性:Ra80
- Lumileds LED Light Source
- Iron lamp body
- Particle surface PC diffuser
- Iron sling
- Color rendering:Ra80

特性 Order Information

Part No.	Dimension (mm)	Watt (W)	Voltage (V)	Beam Angle	Color
RS-HB05-100	630x300x48	60/80/110	AC110~220V	120°	5000K
RS-HB05-160	630x300x48	125/150/165	AC110~220V	120°	5000K

尺寸圖 Dimension

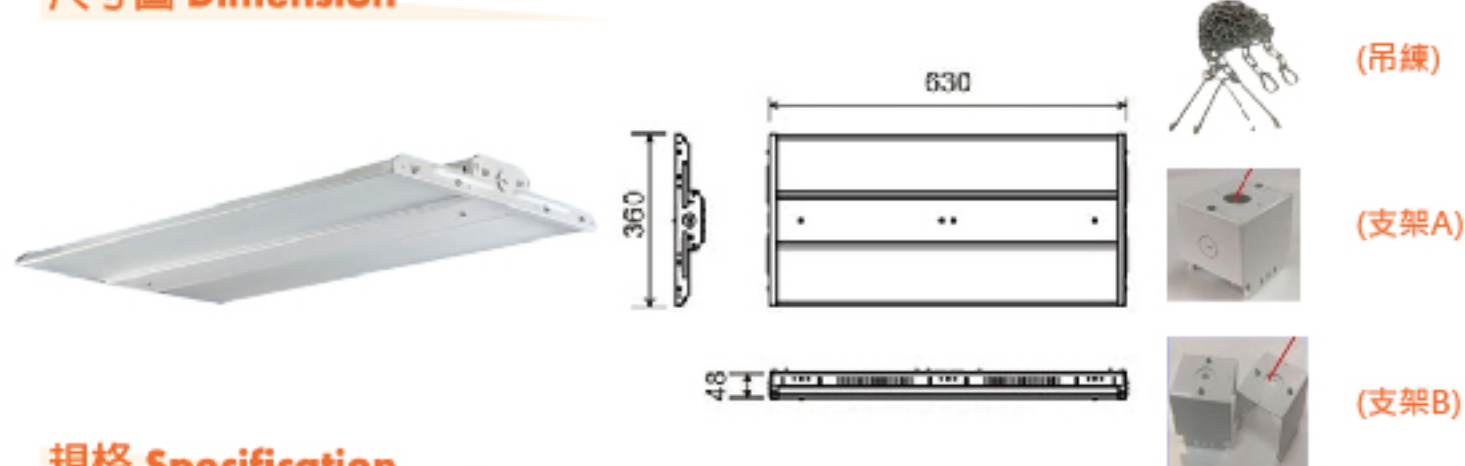

規格 Specification

- Lumileds光源。
- 鐵製燈體。
- 顆粒面PC罩。
- 鐵製吊鍊。
- 演色性:Ra80
- Lumileds LED Light Source
- Iron lamp body
- Particle surface PC diffuser
- Iron sling
- Color rendering:Ra80



特性 Order Information

Part No.	Dimension (mm)	Watt (W)	Voltage (V)	Beam Angle	Color
RS-HB05-200	630x360x48	180/200/220	AC110~220V	120°	5000K

COMMERCIAL LIGHTING SERIES

COMMERCIAL LIGHTING

尺寸圖 Dimension

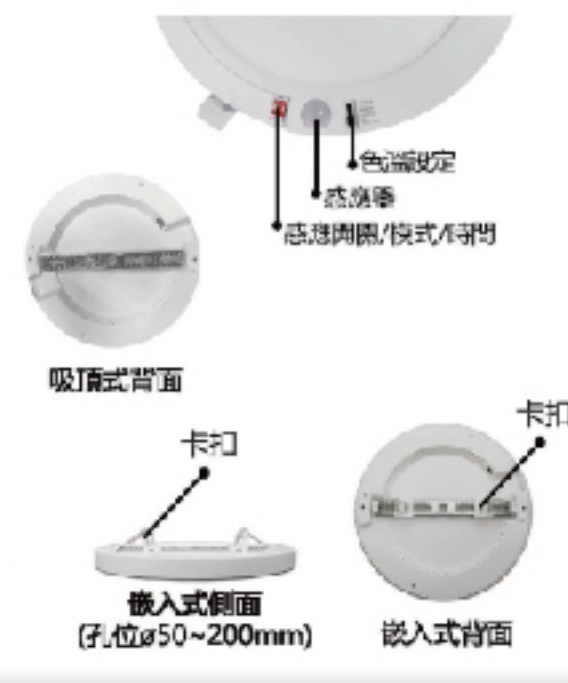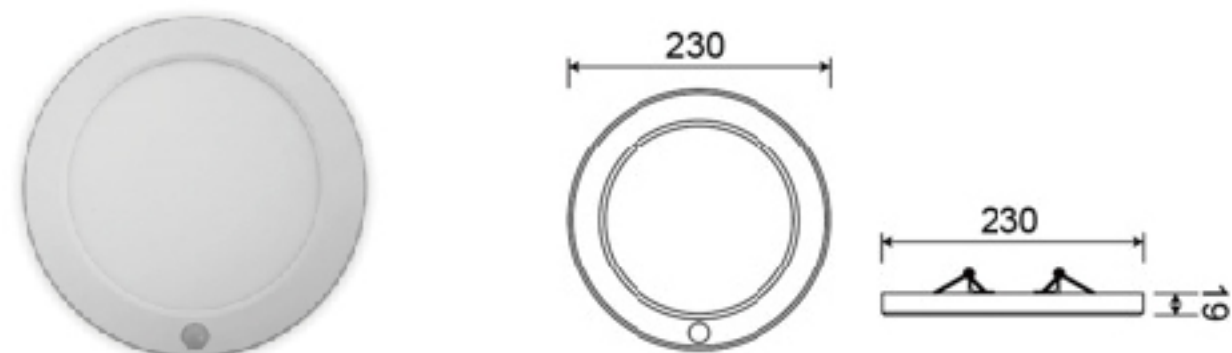

規格 Specification

- 本體:塑膠材質成型,經粉體烤漆處理
- 燈罩:PMMA材質乳白罩
- 工作溫度:-20°~+40°
- 感應器角度設定:120°/360°
- 多段式選擇切換色溫3000K/4000K/6000K
- Plastic material molding, powder coated
- PMMA material milky diffuser
- Environment: -20°~+40°
- Sensing angle: 120°/360°
- 3000K/4000K/6000K Setting Available

特性 Order Information

Part No.	Dimension (mm)	Watt (W)	Voltage (V)	Beam Angle	Color
RL-CP04	Ø230x19	1600	18	AC110~220V	120°/360°

RL-1913-1



尺寸: L85 x W85 x H77mm
光源: CREE NICHIA/GU5.3
瓦數: 5.5W / 7W / 8W / 9W / 10W / 12W
光學角度: 25° 40°
電壓: 100V~240V
調光: TRIAC調光/1-10V調光
色溫: 2700K 3000K 4000K 5700K 6500K
材質: 鋁/鋼板烤漆
顏色: 黑
IP: 20
嵌入孔: 85 x 85mm



RL-1927-3




尺寸: $\varnothing 103$ x H110mm
光源: CREE NICHIA GU5.3
瓦數: 5.5W / 7W / 8W / 9W / 10W / 12W
光學角度: 10° 25° 36° 40°
電壓: 100V~240V
色溫: 2700K 3000K 4000K 5000K 6500K
材質: 鋁
顏色: 白
IP: 20
嵌入孔: $\varnothing 92$ mm



RL-1930-1



尺寸: $\varnothing 95$ x H95mm 框寬5mm 內縮30mm
光源: CREE NICHIA GU5.3
瓦數: 5.5W / 7W / 8W
光學角度: 25° 40°
電壓: 100V~240V
調光: TRIAC調光/1-10V調光
色溫: 3000K 4000K 5700K
材質: 鋁
顏色: 白/黑
IP: 20
嵌入孔: $\varnothing 84$ mm



RL-1926-3



尺寸: $\varnothing 185$ x H46mm
光源: OSRAM
瓦數: 16W
光學角度: 120°
電壓: 100V~240V
色溫: 3000K 4000K 6000K
材質: 鋁
顏色: 白
IP: 20
嵌入孔: $\varnothing 145$ mm



RL-1944-2



尺寸: L111 x W42mm
光源: CREE
瓦數: 25W
光學角度: 10° 20° 30°
CR: 90
電壓: 100V~240V
色溫: 3000K 4000K 5000K 6500K
材質: 鋁
顏色: 黑/銀
IP: 20



RL-1944-4



尺寸: $\varnothing 111$ x H41mm
光源: OSRAM NICHIA
瓦數: 12W / 15W
光學角度: 35°
電壓: 100V~240V
色溫: 3000K 4000K 6000K
材質: 鋁
顏色: 黑/銀
IP: 20



RL-1933-2



尺寸: $\varnothing 83$ x H90mm
光源: CREE NICHIA GU5.3
瓦數: 5.5W / 7W / 8W / 9W / 10W / 12W
光學角度: 25° 40°
電壓: 100V~240V
調光: TRIAC調光/1-10V調光
色溫: 2700K 3000K 4000K 5000K 6500K
材質: 鋁
顏色: 白
IP: 20
嵌入孔: $\varnothing 70$ mm



RL-1933-3



尺寸: $\varnothing 82$ x H115mm 框寬5mm 內縮30mm
光源: CREE NICHIA GU5.3
瓦數: 瓦數: 5.5W / 7W / 8W / 9W / 10W / 12W
光學角度: 18° 25° 40°
電壓: 100V~240V
調光: TRIAC調光/1-10V調光
色溫: 2700K 3000K 4000K 5000K 5700K 6500K
材質: 鋁
顏色: 白/黑
IP: 20
嵌入孔: $\varnothing 70$ mm



RL-1935-2



尺寸: $\varnothing 85$ x H75mm 框寬5mm 內縮17mm
光源: CREE NICHIA GU5.3
瓦數: 5.5W / 8W
光學角度: 25° 40°
電壓: 100V~240V
調光: TRIAC調光/1-10V調光
色溫: 3000K 4000K 5700K
材質: 鋁
顏色: 白
IP: 20
嵌入孔: $\varnothing 75$ mm



RL-1945-1



尺寸: $\varnothing 50$ x H70mm
光源: CREE
瓦數: 7W / 9W / 10W / 12W
光學角度: 25° 40°
CRI: 90
電壓: 100V~240V
色溫: 2700K 3000K 4000K 5000K 6500K
調光: TRIAC調光/1-10V調光
材質: 鋁
顏色: 黑
IP: 20



RL-1934-1



尺寸: $\varnothing 80$ H90mm
光源: CREE NICHIA GU5.3
瓦數: 5.5W / 8W
光學角度: 25° 40°
電壓: 100V~240V
調光: TRIAC調光/1-10V調光
色溫: 3000K 4000K 5700K
材質: 鋁
顏色: 白/拋光線 / 黑
IP: 20
嵌入孔: $\varnothing 75$ mm



RL-1936-1



尺寸: $\varnothing 72$ x H20mm
光源: NICHIA OSRAM SMD
瓦數: 5W
光學角度: 40° 60°
電壓: 100V~240V
色溫: 2700K 3000K 4000K 6500K
材質: 鋁
顏色: 白/黑/銀
IP: 20
嵌入孔: $\varnothing 58$ mm



RL-1902-1



光源:CREE/GU5.3
瓦數:5.5W / 7W / 9W / 10W / 12W
光學角度:25° 40°
電壓:100V~240V
色溫:2700K 3000K 4000K 5000K 5700K
材質:鋁
顏色:白/黑
IP:20



RL-1913-2



尺寸:L171 x W85 x H77mm
光源:CREE NICHIA/GU5.3
瓦數:5.5W / 7W / 8W / 9W / 10W / 12W
光學角度:25° 40°
電壓:100V~240V
色溫:2700K 3000K 4000K 5700K 6500K
材質:鋁/鋼板烤漆
顏色:黑
IP:20
嵌入孔:171x85mm



RL-1910-2



尺寸:ø59 x W125 x H190mm
光源:CREE NICHIA/GU5.3
瓦數:5.5W / 7W / 8W / 9W / 10W / 12W
光學角度:25° 35° 45°
電壓:100V~240V
調光:TRIAC調光/1-10V調光
色溫:2700K 3000K 4000K 5000K 5700K 6500K
材質:鋁
顏色:白/黑
IP:20
※燈具內縮30mm有效防止眩光



RL-1915-2




尺寸:L170 x W84 x H130mm
光源:CREE NICHIA/GU5.3
瓦數:5.5W / 7W / 8W / 9W / 10W / 12W
光學角度:25° 40°
電壓:100V~240V
調光:TRIAC調光/1-10V調光
色溫:2700K 3000K 4000K 5000K 6500K
材質:鋁/鋼板烤漆
顏色:黑
IP:20
嵌入孔:170 x 84mm



RL-1904-2



尺寸:ø125 x W110 x H200mm
光源:CREE OSRAM NICHIA
瓦數:25W / 35W / 45W
光學角度:25° 40° 60° 140°
電壓:100V~240V
色溫:2700K 3000K 4000K 5000K 6500K
材質:鐵
顏色:白/黑
IP:20



RL-1913-3



尺寸:L256 x W85 x H77mm
光源:CREE NICHIA/GU5.3
瓦數:5.5W / 7W / 8W / 9W / 10W / 12W
光學角度:25° 40°
電壓:100V~240V
調光:TRIAC調光/1-10V調光
色溫:2700K 3000K 4000K 5700K 6500K
材質:鋁/鋼板烤漆
顏色:黑
IP:20
嵌入孔:256x85mm



RL-1911-3



尺寸:ø125 x W74 x H155mm
光源:CREE NICHIA/GU5.3
瓦數:5.5W / 8W
光學角度:25° 40°
電壓:100V~240V
色溫:3000K 4000K 5700K 6500K
材質:鋁
顏色:白/黑
IP:20



RL-1916-1



尺寸:153 x H138mm
光源:CREE NICHIA
瓦數:15W / 20W / 30W
光學角度:8° 25° 40°
電壓:100V~240V
調光:TRIAC調光/1-10V調光
色溫:3000K 4000K 5000K 6500K
材質:鐵
顏色:白/黑
IP:20



RL-1908-1



尺寸:ø99 x W145 x H250mm
光源:CREE
瓦數:25W / 35W
光學角度:10° 20° 30°
電壓:100V~240V
色溫:2700K 3000K 4000K 5000K 5700K 6500K
材質:鋁
顏色:白/黑
IP:20



RL-1915-1



尺寸:L84 x W84 x H130mm
光源:CREE NICHIA/GU5.3
瓦數:5.5W / 7W / 8W / 9W / 10W / 12W
光學角度:25° 40°
電壓:100V~240V
調光:TRIAC調光/1-10V調光
色溫:2700K 3000K 4000K 5000K 6500K
材質:鋁/鋼板烤漆
顏色:黑
IP:20
嵌入孔:84 x 84mm



RL-1912-3



尺寸:ø100 x H90mm
光源:CREE NICHIA/GU5.3
瓦數:5.5W / 7W / 8W / 9W / 10W / 12W
光學角度:25° 40°
電壓:100V~240V
調光:TRIAC調光/1-10V調光
色溫:3000K 4000K 6000K
材質:鋼板烤漆
顏色:黑
IP:20
嵌入孔:ø100
※無邊框開孔請精準開孔



RL-1920-1



尺寸:L149 x W70 x H100mm
光源:CREE NICHIA/GU5.3
瓦數:5.5W / 7W / 8W / 9W / 10W / 12W
光學角度:25° 35° 40°
電壓:100V~240V
調光:TRIAC調光/1-10V調光
色溫:2700K 3000K 4000K 5000K 5700K 6500K
材質:鋁
顏色:白
IP:20



RL-YY-6060




平板燈
尺寸:L600xW600mm
瓦數:18W
光學角度:180°
電壓:100V~240V
色溫:3000K/4000K/5700K/6500K
效率:150lm/m
流名:3000lm



RL-YY-LD12



雷達感應三防燈
尺寸:L1200xW70xD49mm
瓦數:24W
電壓:100V~240V
色溫:3000K/4000K/5700K/6500K
效率:120lm/w
流名:2880lm



RL-YY-SU126



T5 支架燈
尺寸:1200mm/585mm
瓦數:7w/14w
電壓:100V~240V
色溫:3000K/4000K/6500K
光學角度:300°
流名:1680lm/720lm



RL-YY-1230





平板燈
尺寸:L1200xW30mm
瓦數:2W
光學角度:180°
電壓:100V~240V
色溫:3000K/4000K/5700K/6500K
效率:140lm/m
流名:3750lm



RL-YY-PF




面框燈
尺寸:L600xW600mm
瓦數:36
電壓:100V~240V
色溫:3000K/4000K/5700K/6500K
光學角度:180°
流名:130lm/w

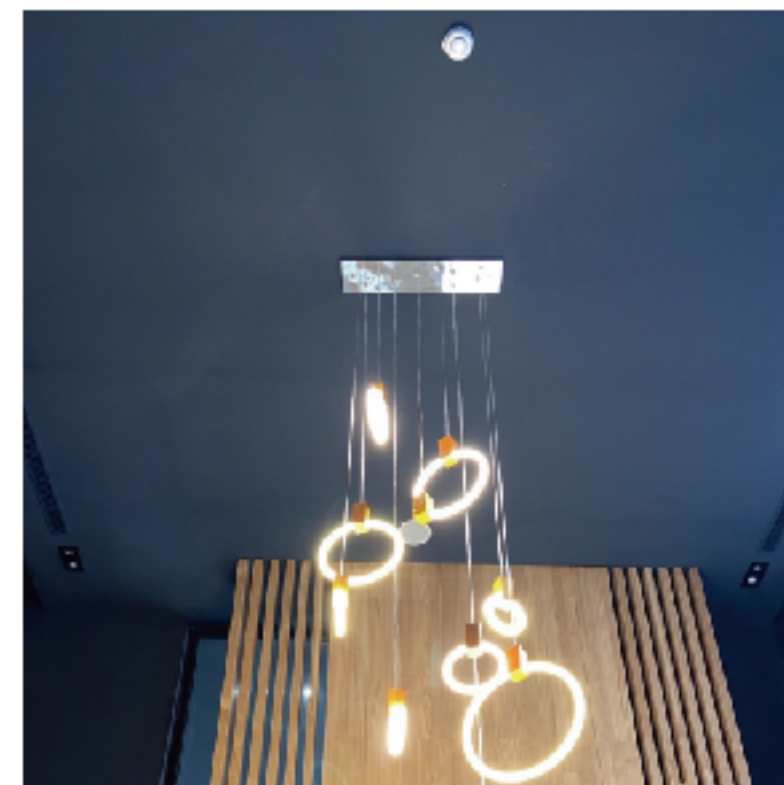



Photoshop Single Color Timer Setting




Spec In Design Service

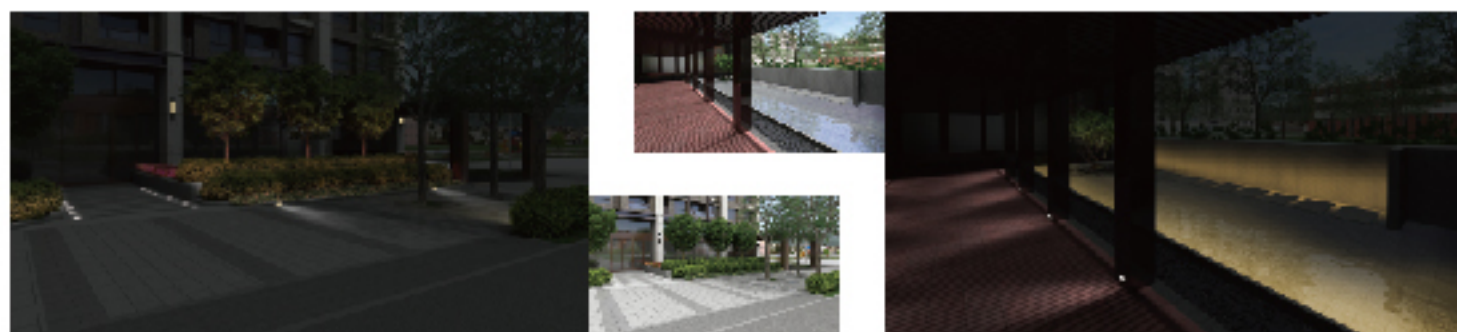



RGB Flash Design Service

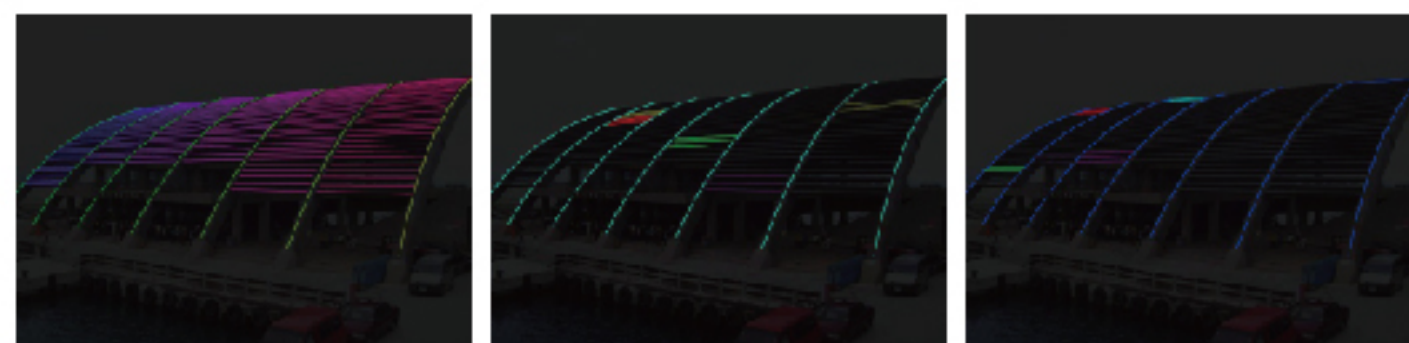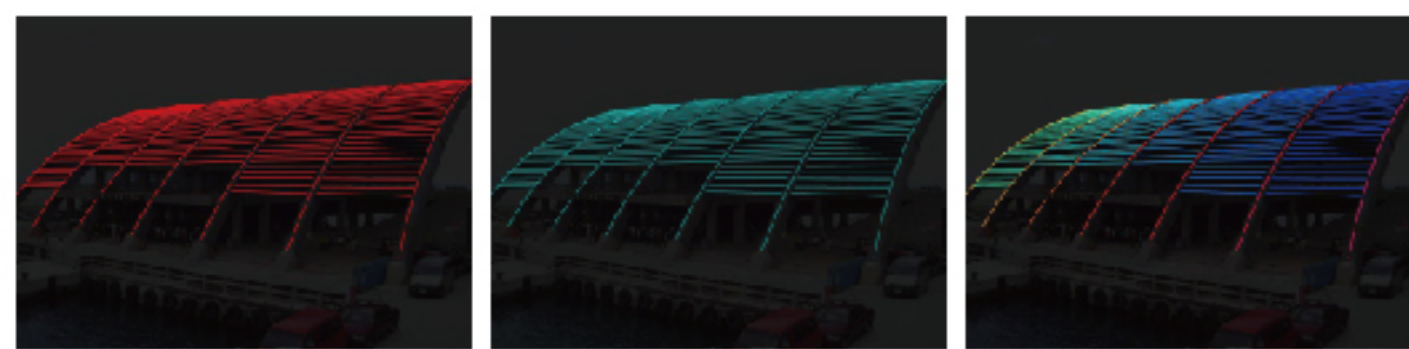


Dialux Service

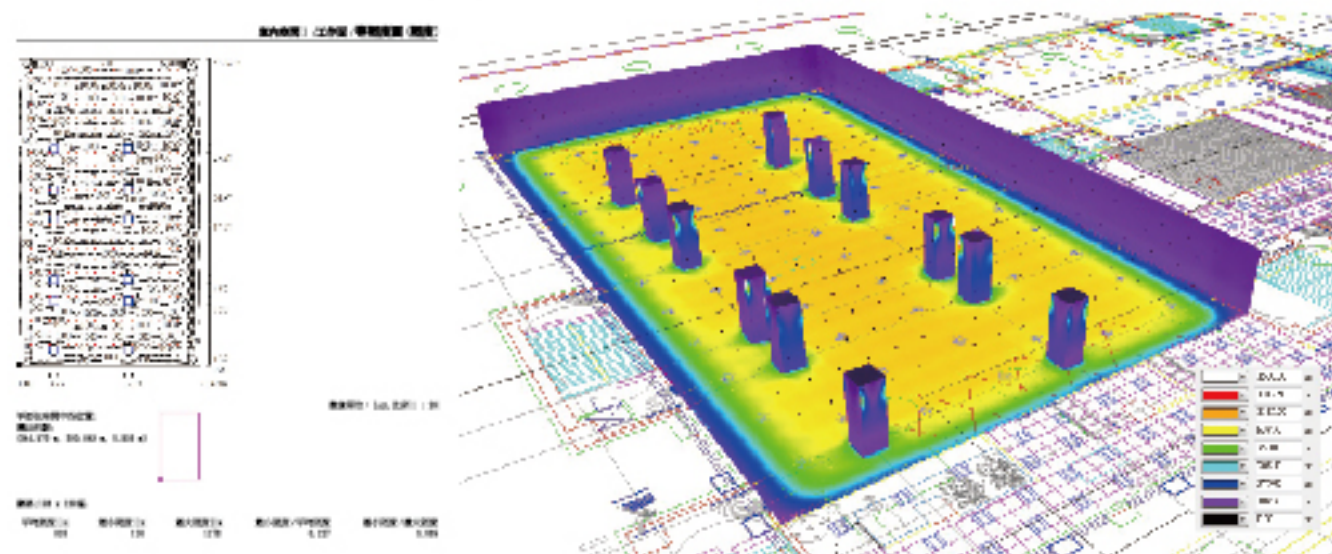



Linear of Facade Lighting For Building









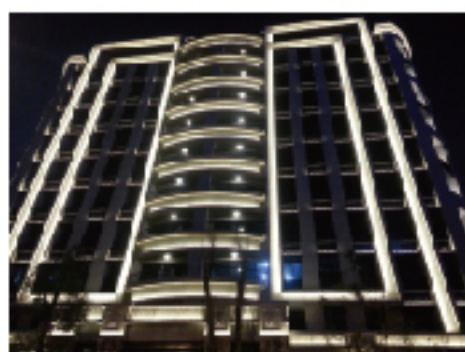
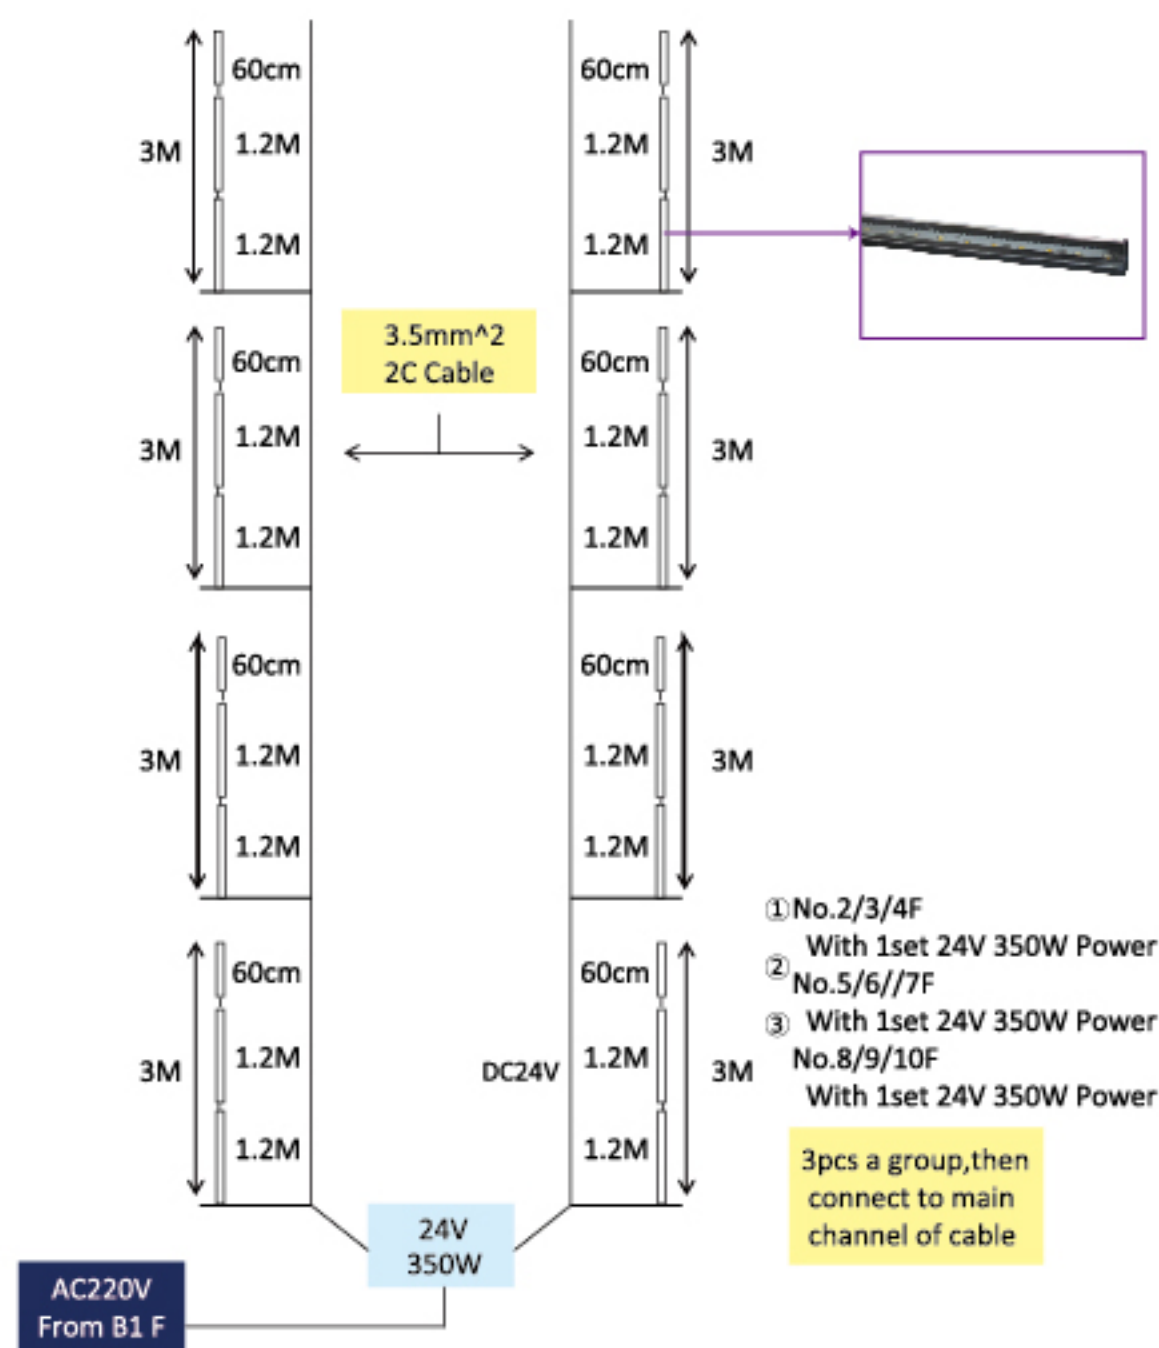









Fade In & Fade Out RGB Lighting

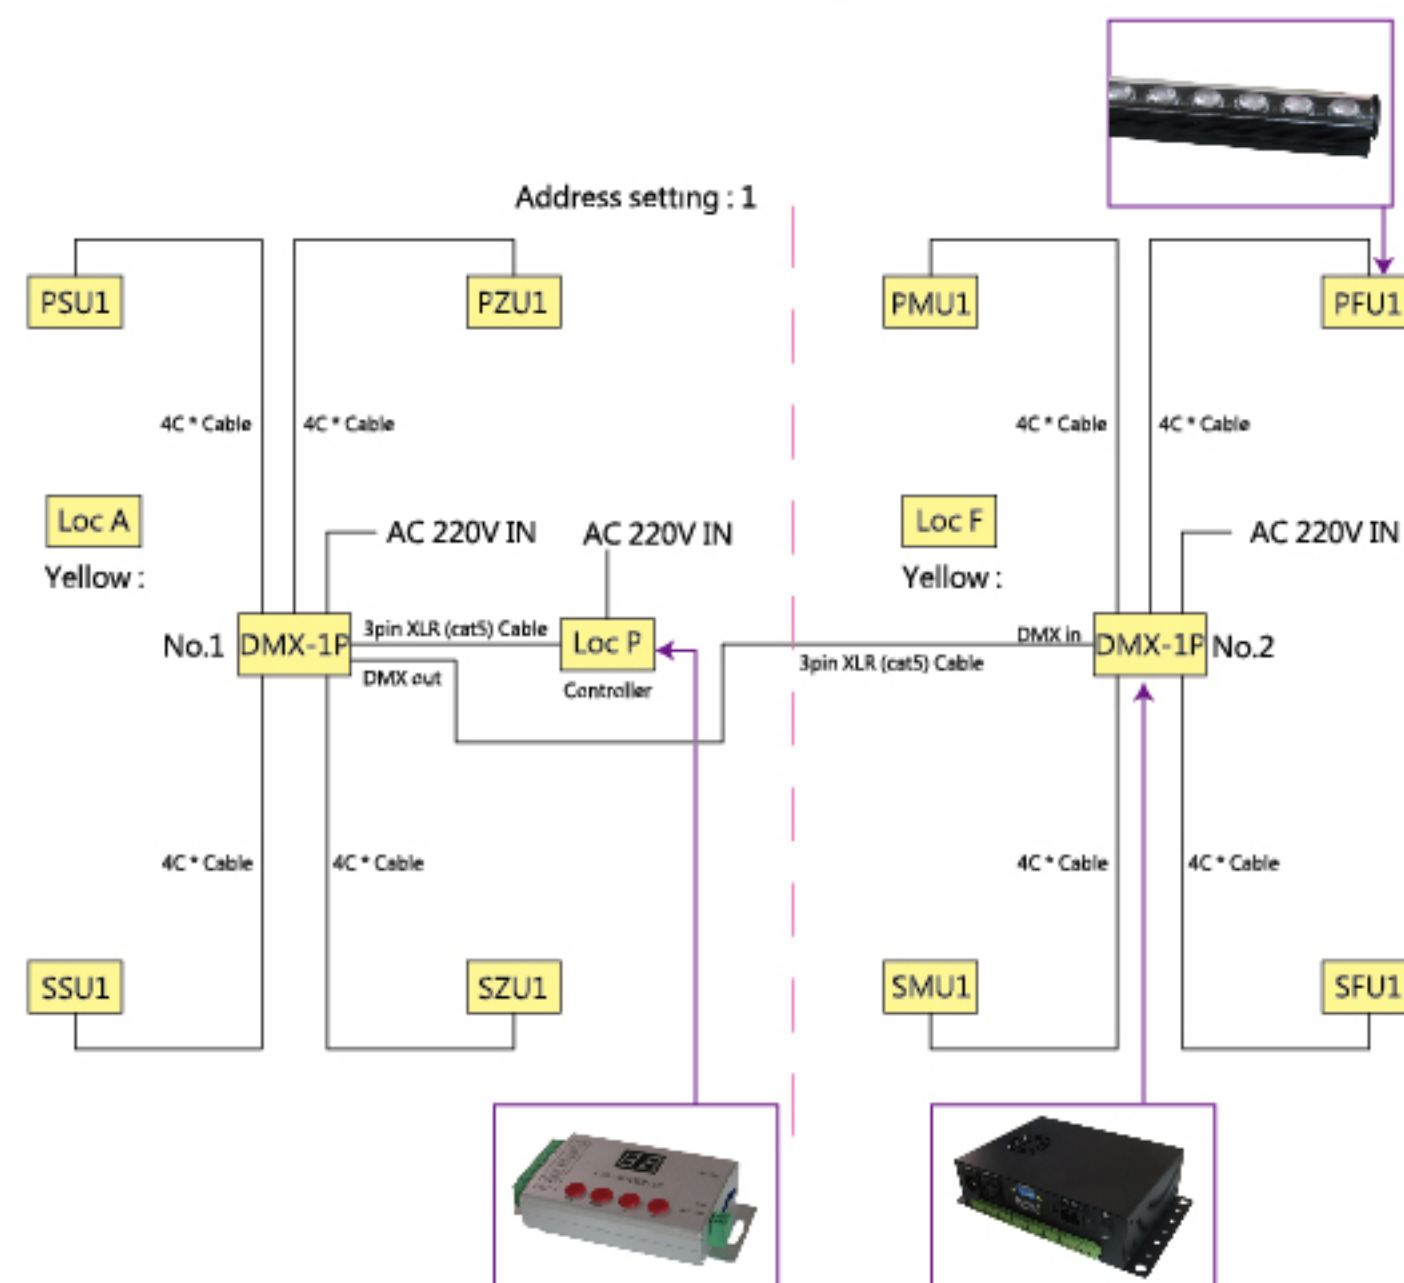

Schematic for Sparkling at Random Facade Lighting


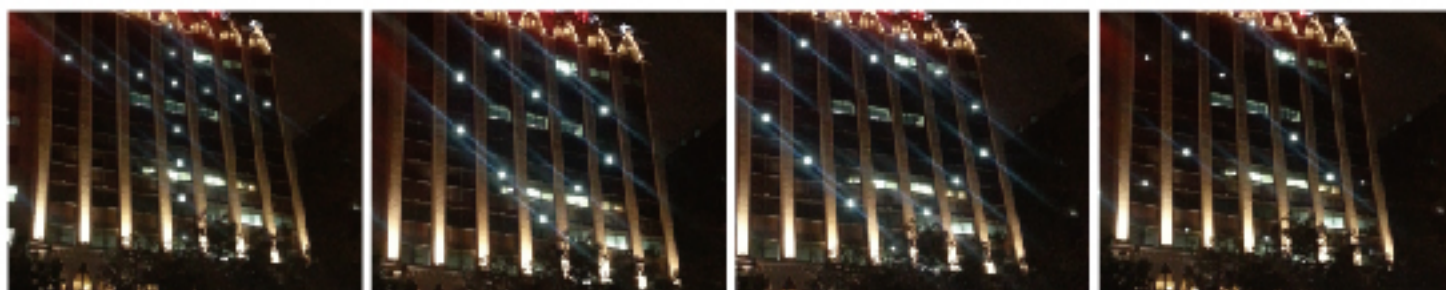
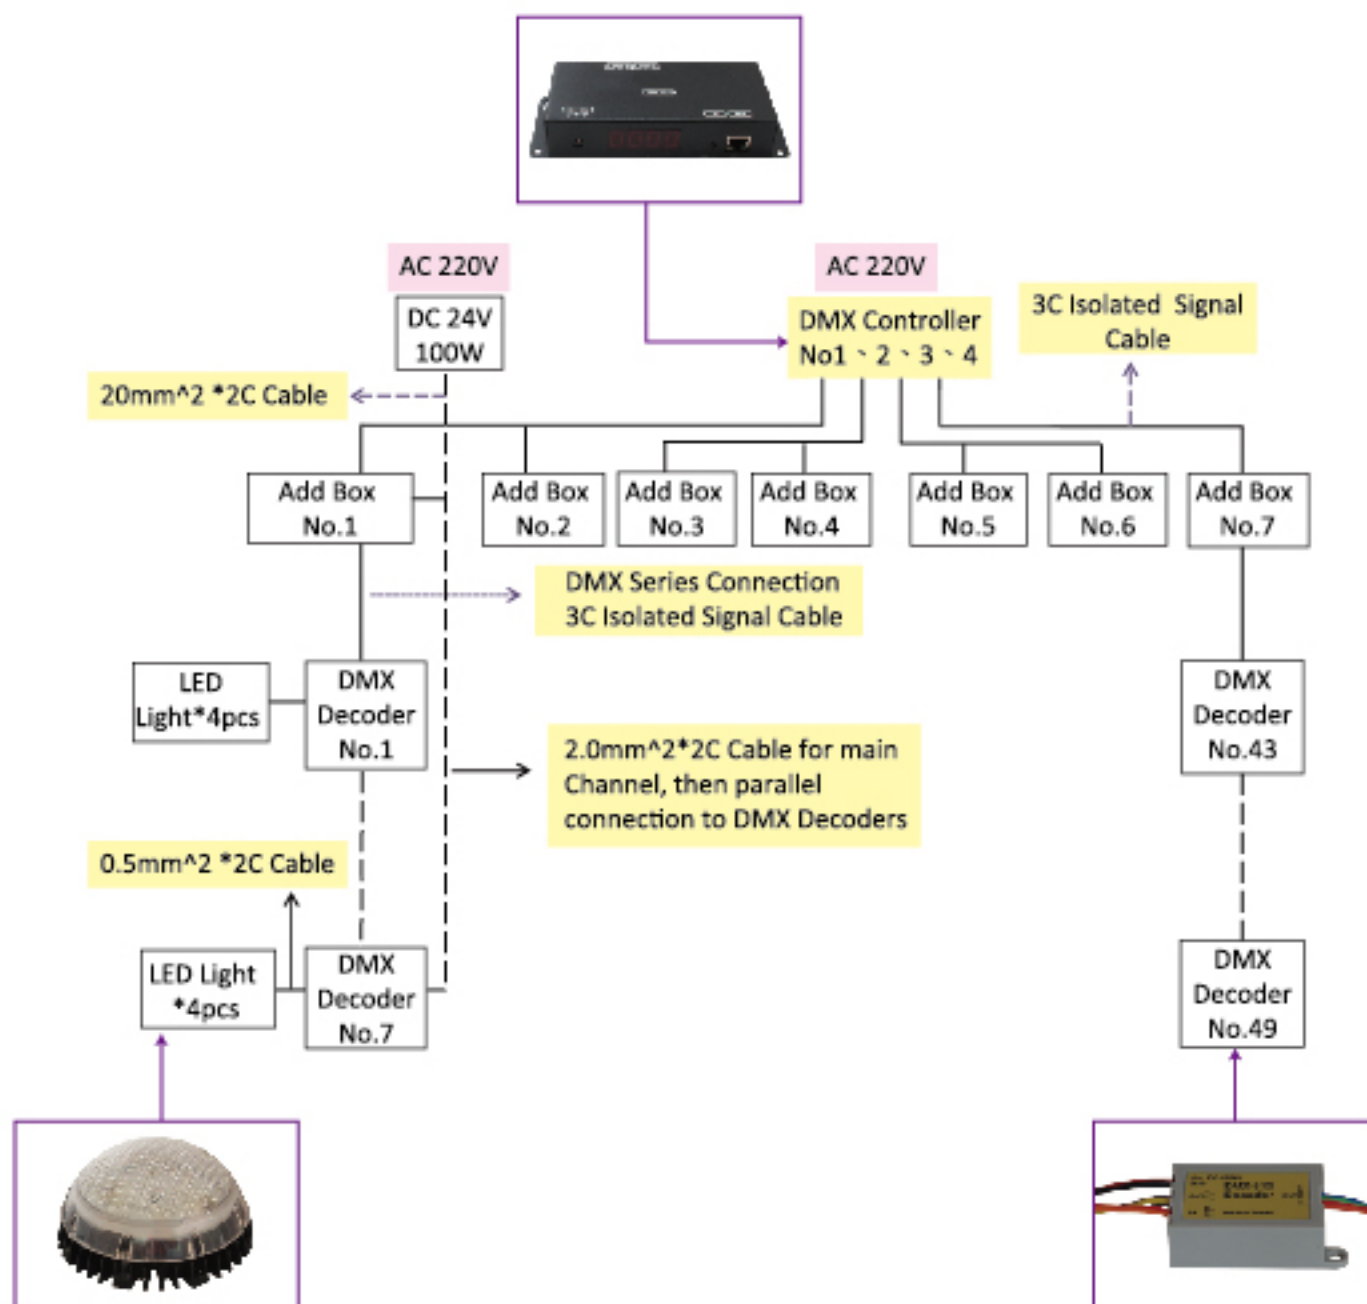


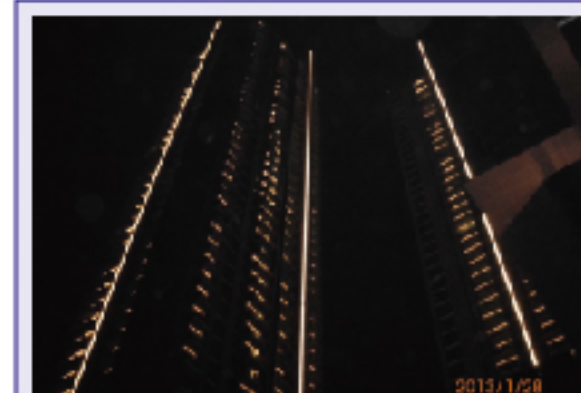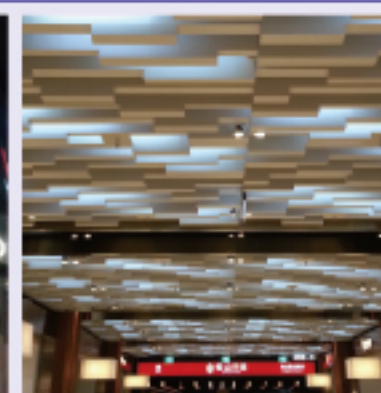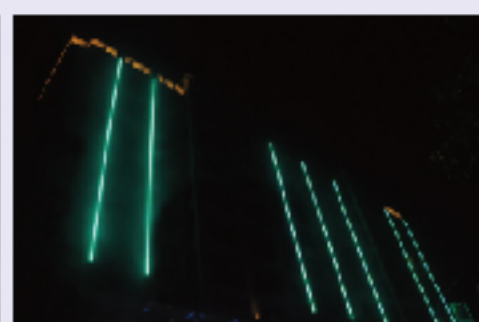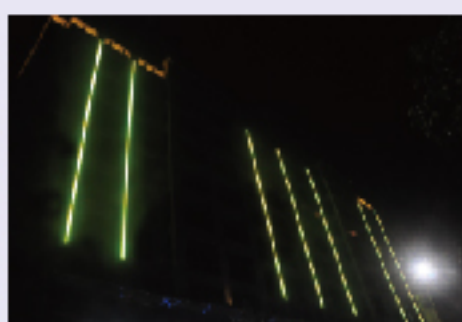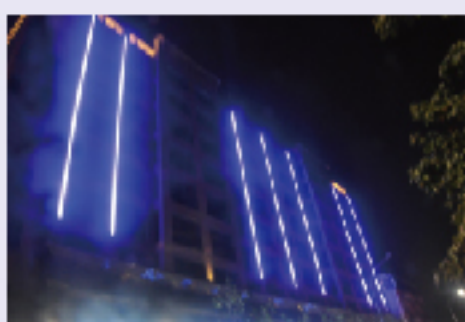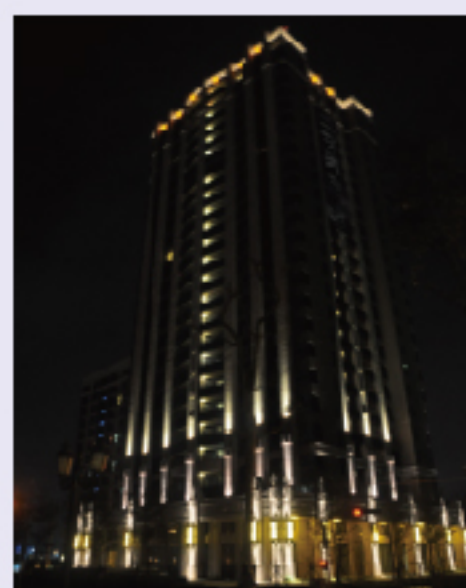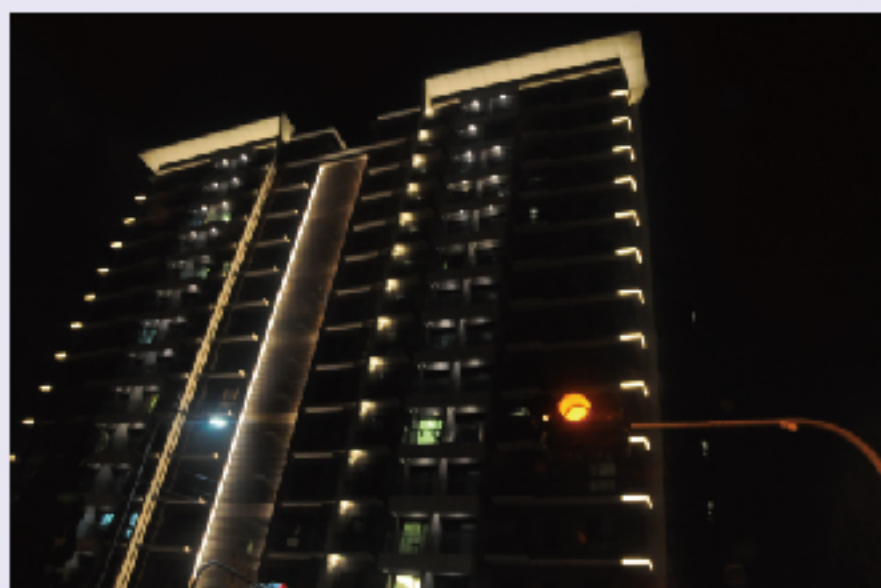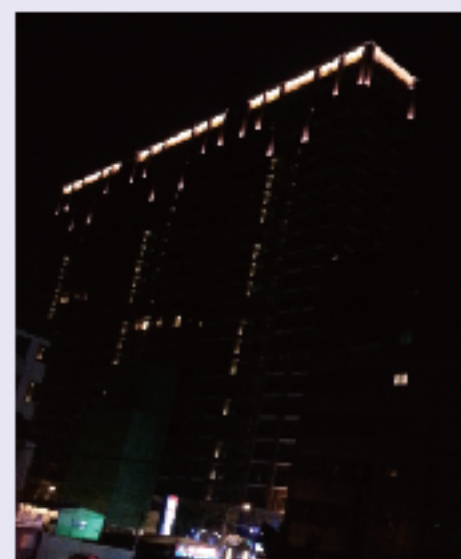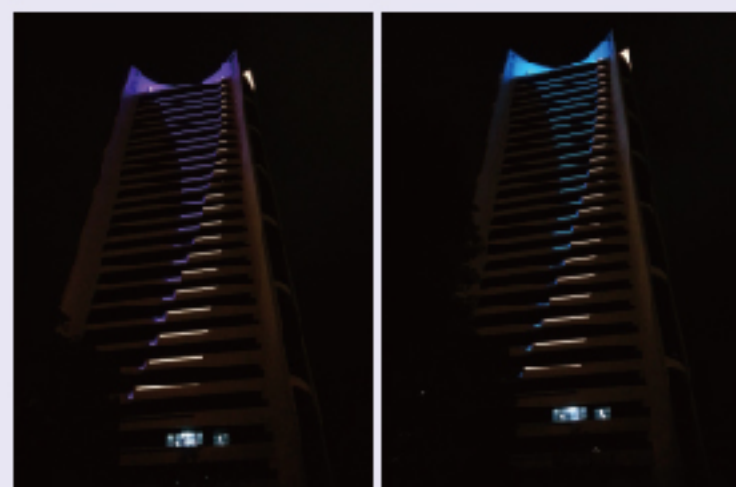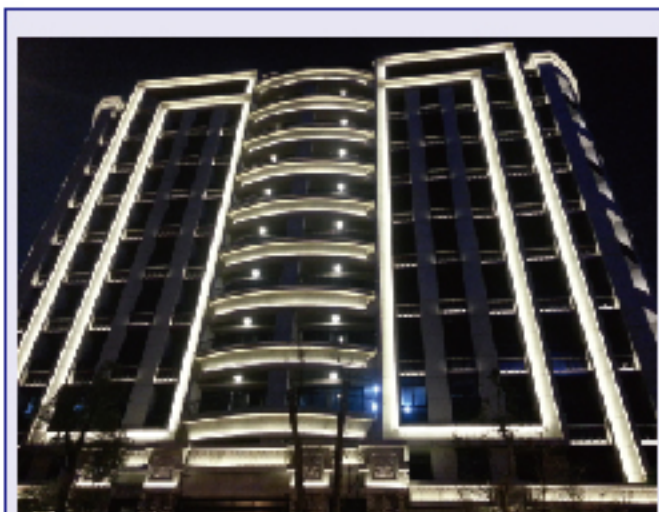

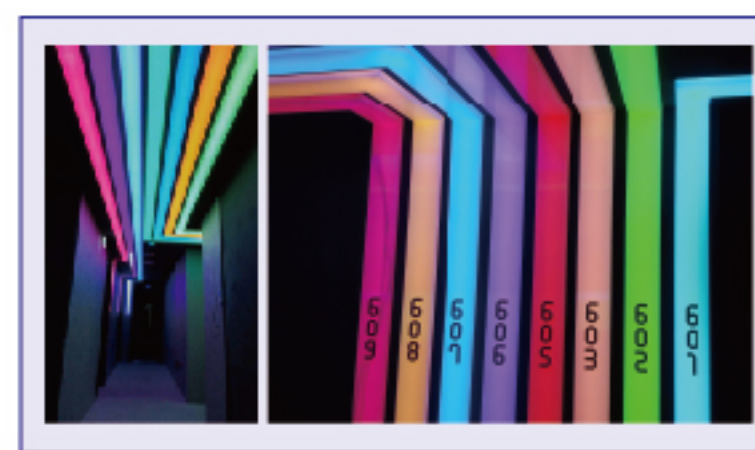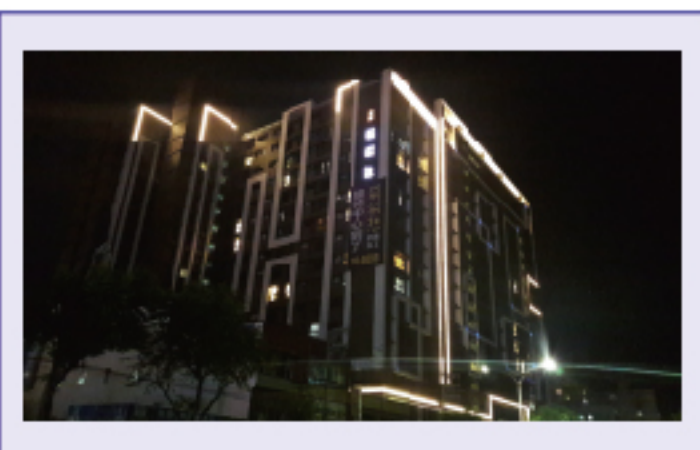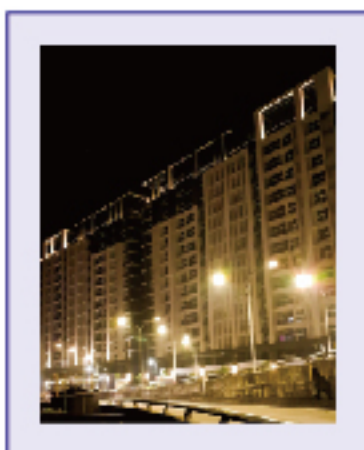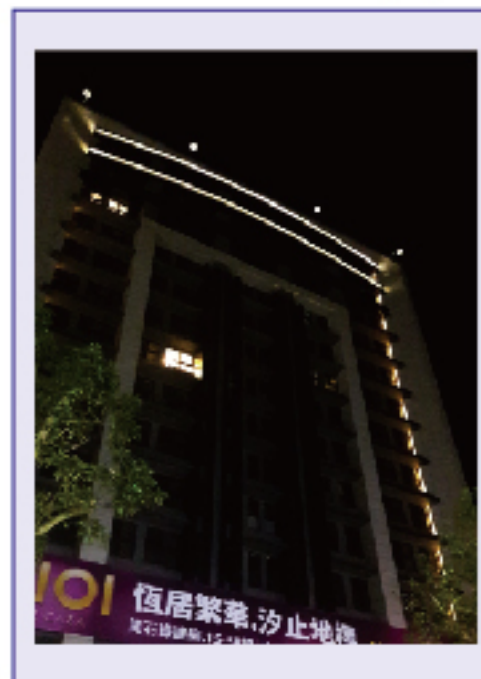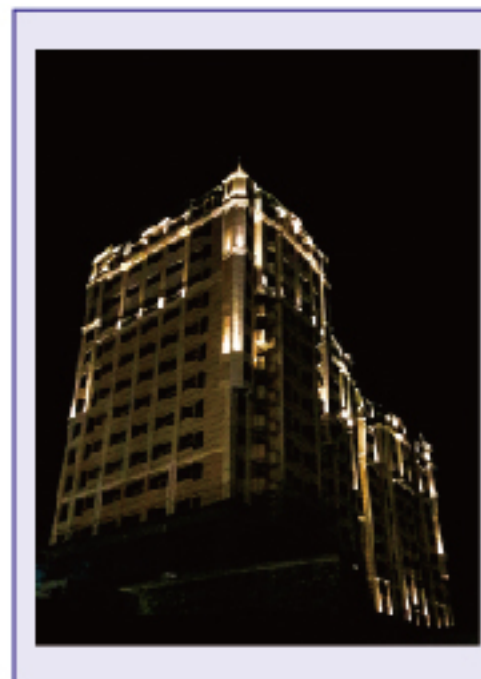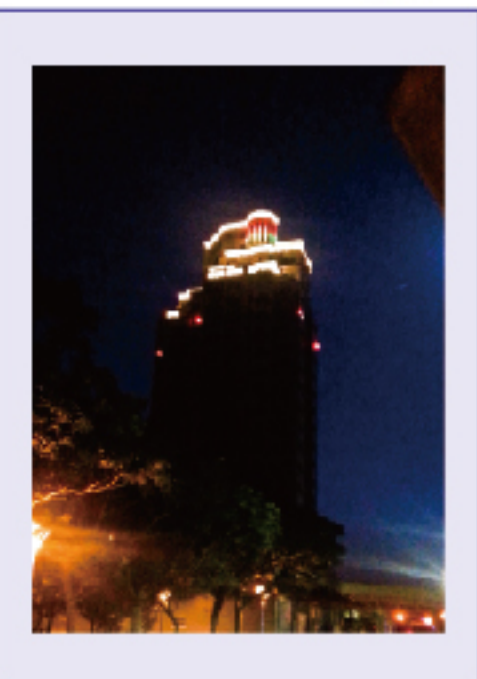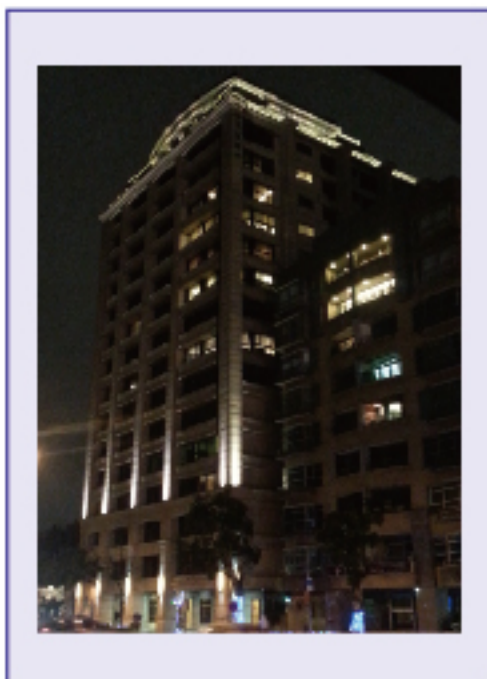



SHOW CASE REFERENCE











工程實績

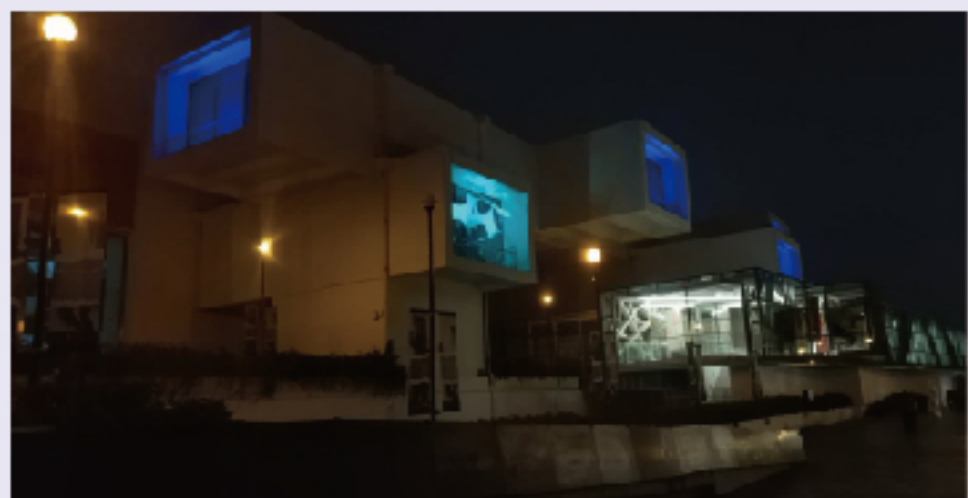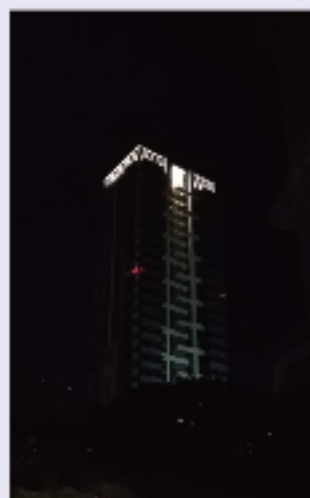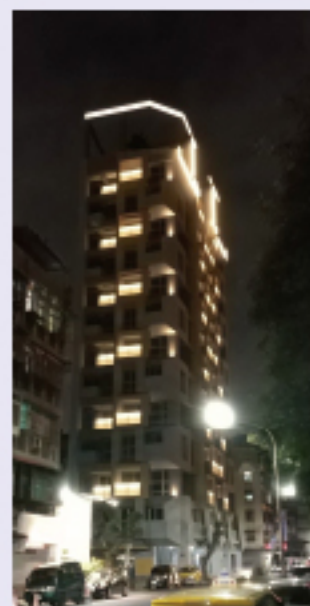



SHOW CASE REFERENCE

工程實績

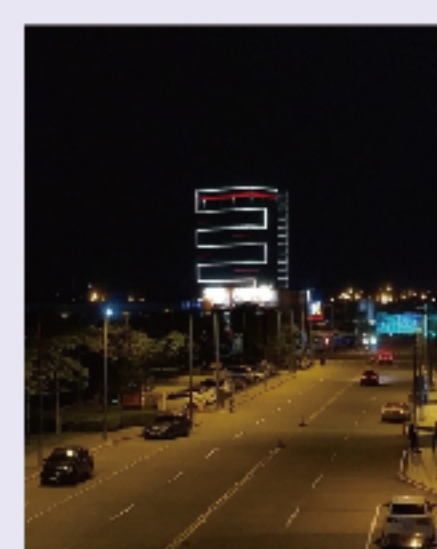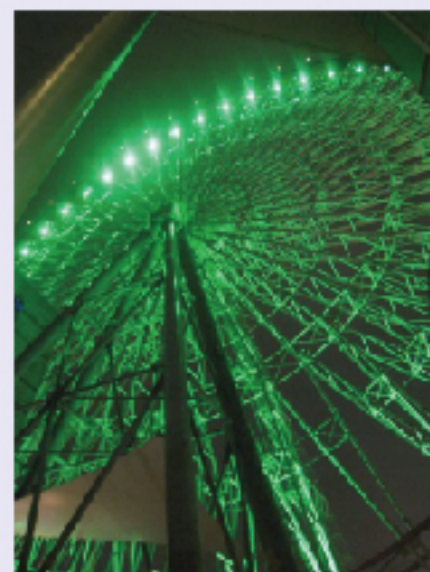

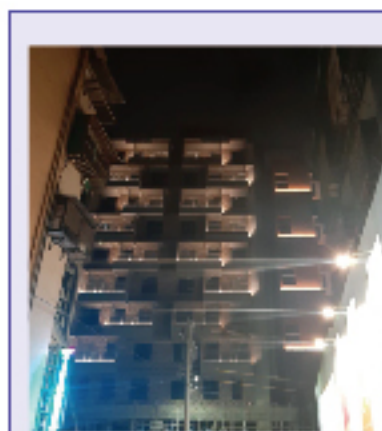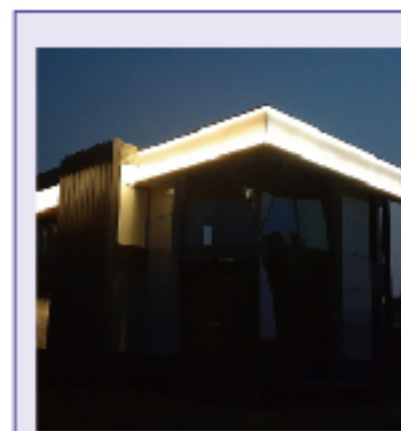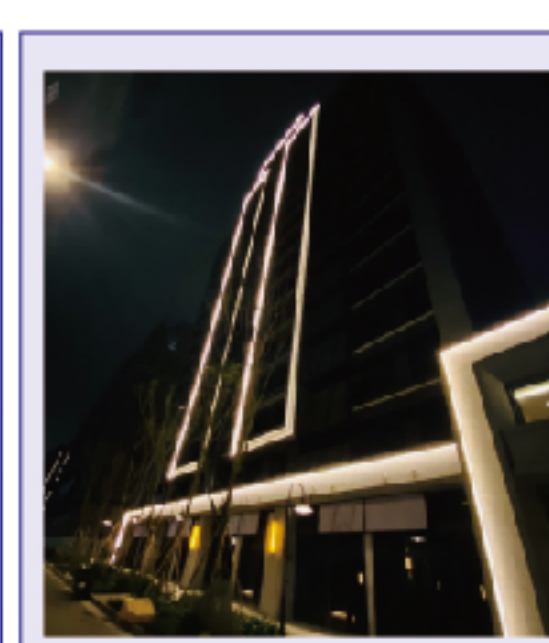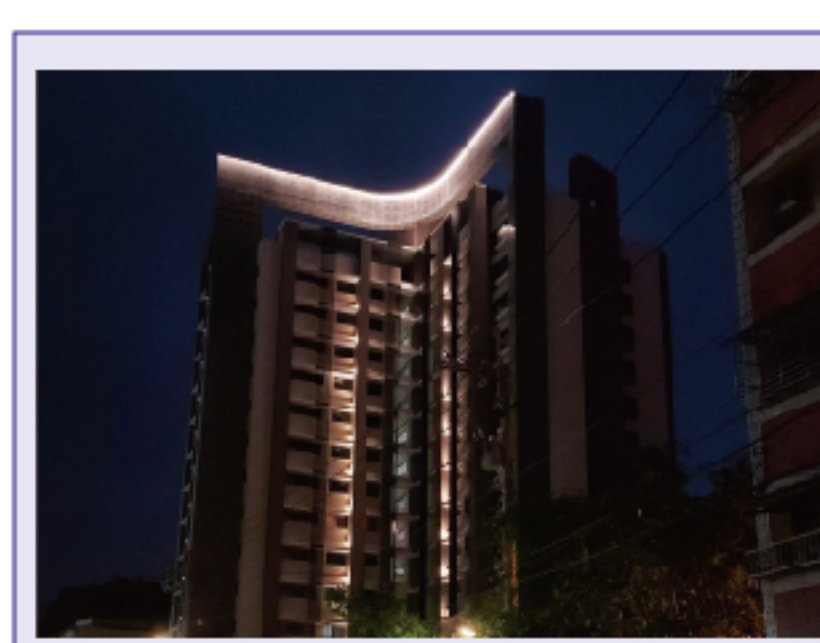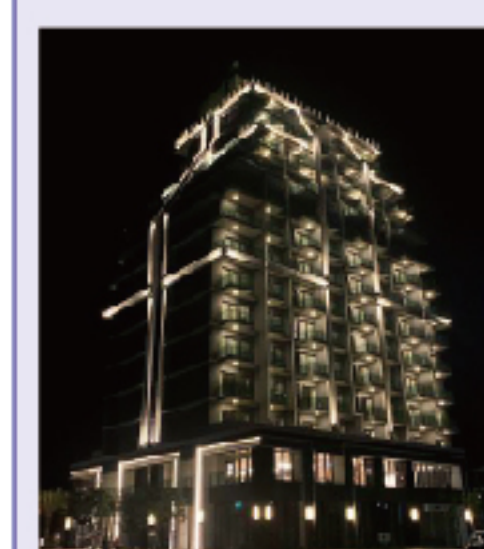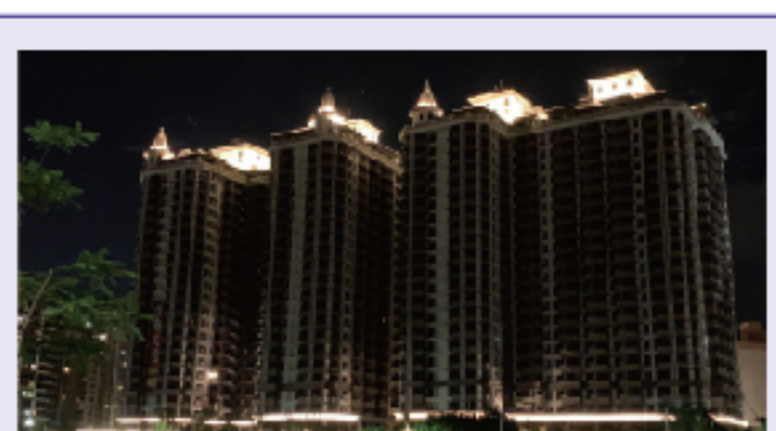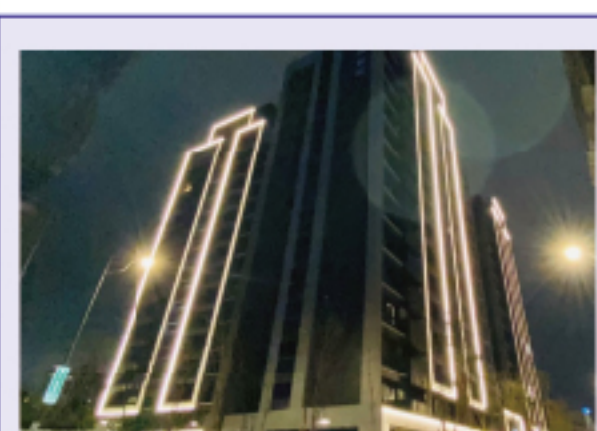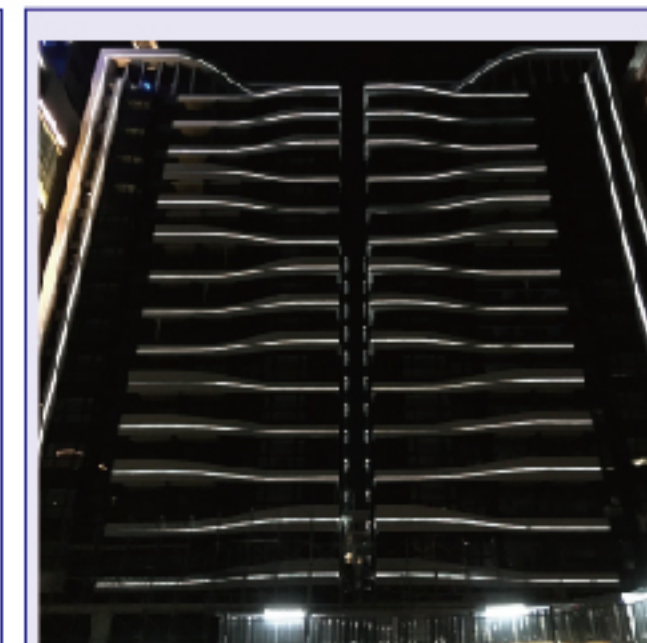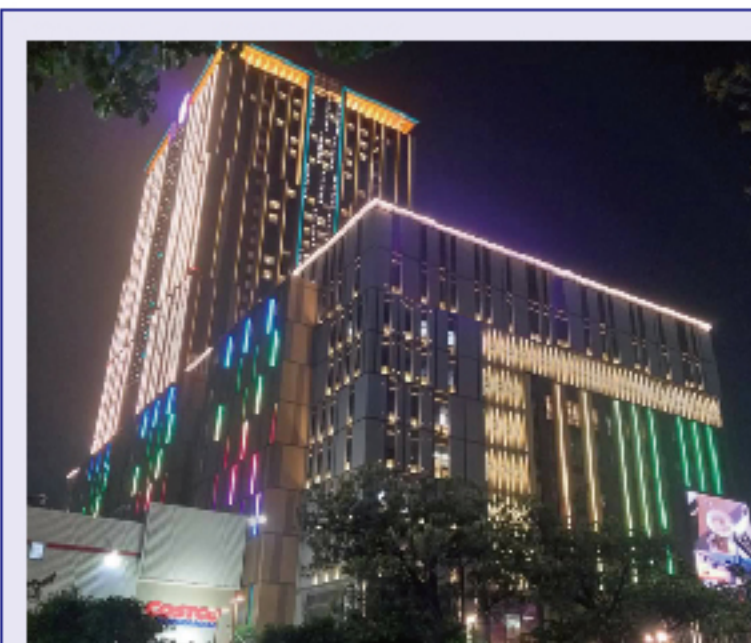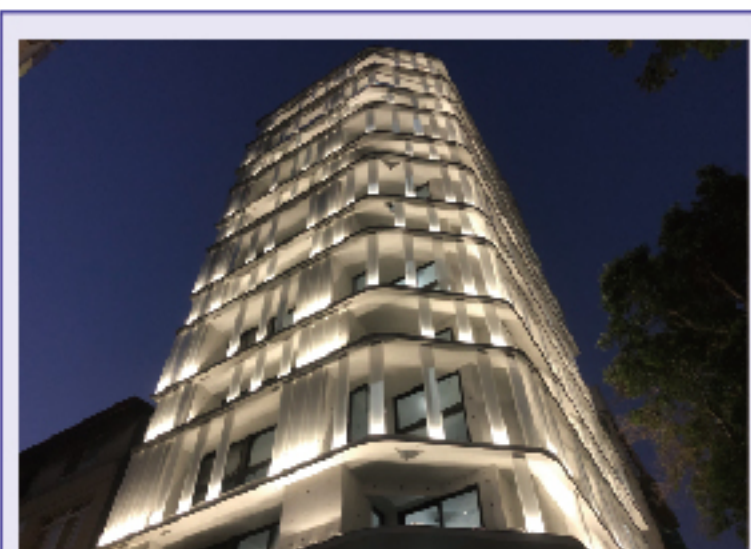

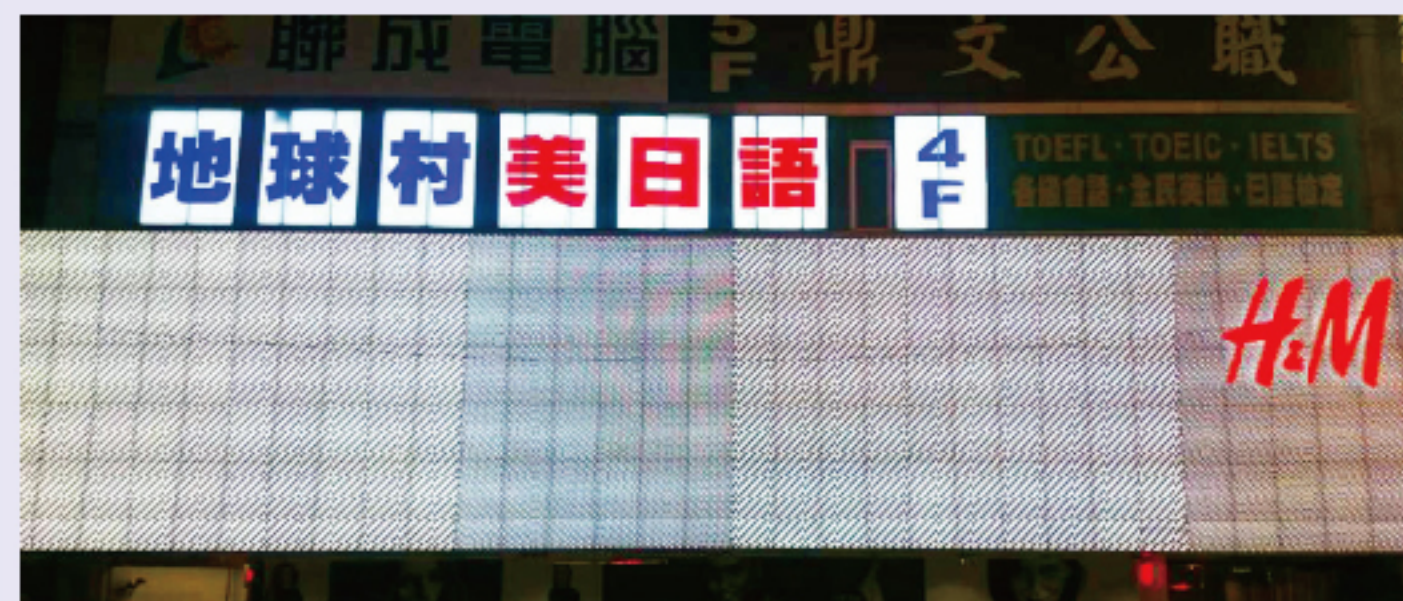

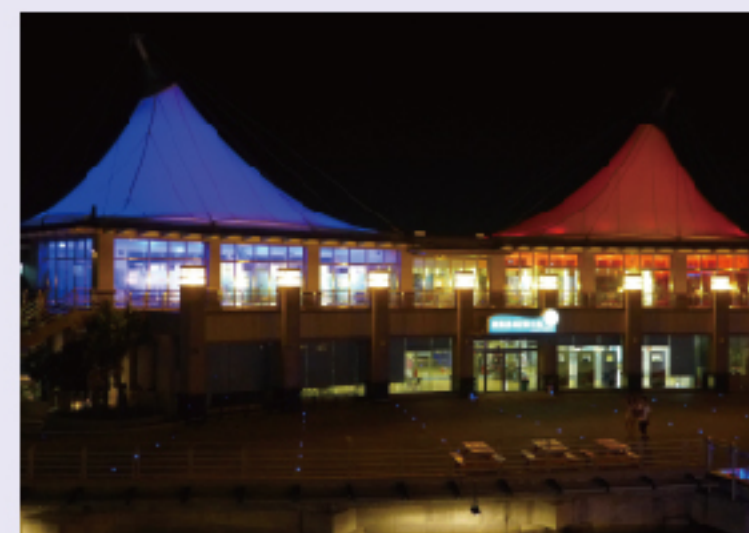

SHOW CASE REFERENCE

工程實績



SHOW CASE REFERENCE

工程實績

