

雙金屬溫度計



BI-Metal Dial Thermometers

BL (T)型 BL TYPE ▶▶▶▶▶

Note

When ordering specify

- 1.Type No.
- 2.Case Dial.
- 3.Temperature Range.
- 4.Connection.
- 5.Stem Dial.
- 6.Stem Length.

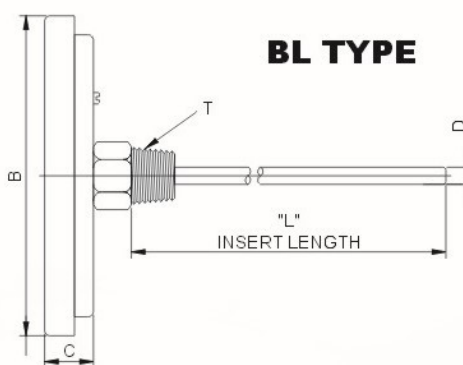

(mm)

Type No. Symbol	A	B	C	D	L	T
BL2	49	58	14	6	By order	1/4"PT
BL3	70	84	17	6.35		3/8"PT
BL4	100	119	18	8		1/2"PT
BL5	125	141	18	10		3/4"PT
BL6	150	166	18	12		

Specifications

- Case Material: 304、316s.s.
- Case Dial: 1.5" ψ 、2" ψ 、2.5" ψ 、3" ψ 、4" ψ 、5" ψ 、6" ψ
- Stem Material: 304、316s.s.
- Temperature Range: -50~600°C
- Window: Glass.
- Connection: 1/4"PT、3/8"PT、1/2"PT、3/4"PT、1"PT(NPT、BSP)
- Stem Length: By order
- Stem Dial: 6mm、6.35mm、8mm
- Accuracy: $\pm 1\%$ F.S.
- Type: BL TYPE
- Applications: Transformer、petrochemicals、driers、foods、air conditioning equip、boilers & other general industrial uses.