

SPECIFICATION FOR APPROVAL

1. SCOPE

THIS SPECIFICATION DEFINES THE ELECTRICAL AND MECHANICAL CHARACTERISTICS OF THE DC BRUSHLESS AXIAL FAN AND BLOWER FAN.

2. CHARACTERS

No.	ITEM	SPECIFICATION
2 - 1	Rated Voltage	12.0 V DC
2 - 2	Starting Voltage	N/A
2 - 3	Operating Voltage Range	10.8 ~ 13.2 V DC
2 - 4	Rated Current	Max. 2.50 A Duty cycle =100%
2 - 5	Rated Power	Max. 30.00W Duty cycle =100%
2 - 6	Start Peak Current	N/A In Free Air & At 12 V DC
2 - 7	UL Current On Label	3.0 A
2 - 8	Rated Speed	(INLET) 15000±10% RPM Duty cycle =100%
		(OUTLET) 13000±10% RPM Duty cycle =100%
		(Testing Speed after Continuous 3 Minutes Operation at Ambient Temperature of 25°C)
2 - 9	Air Flow (At Zero Static Pressure)	52.69 CFM (Min. 47.42 CFM)
		1.49 m ³ /min (Min. 1.34 m ³ /min) Duty cycle =100%
2 - 10	Static Pressure (At Zero Air Flow)	120.39 mm-H ₂ O (Min. 97.52 mm-H ₂ O)
		4.74 inch-H ₂ O (Min. 3.84 inch-H ₂ O) Duty cycle =100%
2 - 11	Sound Pressure Level	64.0 dB(A) [Max. 67.0 dB(A)]
2 - 12	Product Type	☒ RoHS ☐ HF
2 - 13	Life Expectancy	70000 HRS at 40°C, 65% humidity and 90% CL.
2 - 14	Bearing Type	☒ Two Ball ☐ EBR ☐ Ball And Sleeve
2 - 15	Protection & Function	☒ Locked Protection ☐ Impedance Protection
		☐ Hot Swap Protection ☐ Current-Limit
		☒ Polarity Protection ☐ E-Brake
		☒ Auto-Restart
2 - 16	Pole	☐ 4 Pole ☐ 8 Pole ☒ Three Phase
2 - 17	Signal Output	Frequency Generator (FG)
2 - 18	Safety Approval	☒ CE ☒ TUV ☒ UL ☒ UKCA

SPECIFICATION FOR APPROVAL

3. MECHANICAL

No.	ITEM	SPECIFICATION
3 - 1	DIMENSIONS	SEE DIMENSIONS DRAWING
3 - 2	FRAME	☒ PBT (BLACK) PLASTIC (UL 94V-0) ☐ LCP (BLACK) PLASTIC (UL 94V-0)
3 - 3	IMPELLER	☒ PBT (BLACK) PLASTIC (UL 94V-0) ☐ LCP (BLACK) PLASTIC (UL 94V-0)
3 - 4	WEIGHT	200 GRAMS (REF)

4. ENVIRONMENTAL

4 - 1 OPERATING TEMPERATURE _____ - 10°C ~ 70°C

4 - 2 STORAGE TEMPERATURE _____ - 40°C ~ 75°C

4 - 3 OPERATING HUMIDITY _____ 5 TO 90% RH

4 - 4 STORAGE HUMIDITY _____ 5 TO 95% RH

4 - 5 DIRECTION OF ROTATION _____ ☐ CLOCKWISE

☒ COUNTER-CLOCKWISE

VIEWED FROM FRONT OF FAN
BLADE.

SPECIFICATION FOR APPROVAL

4 - 6 DIELECTRIC STRENGTH ————— 5 mA MAX. AT 500 V AC 60Hz
ONE MINUTE [BETWEEN FRAME
AND (+)TERMINAL]

4 - 7 INSULATION STRENGTH ————— 10MEG OHM MIN.AT 500 VDC
[BETWEEN FRAME AND
(+)TERMINAL]

4 - 8 DROP TEST ————— IN MINIMUM PACKAGING
CONDITION, FAN WITHSTAND
EACH ONEDROP OF THREE
FACES FROM 30cm DISTANCE
HEIGHT ONTO 10mm THICKNESS
OF WOODEN BOARD

4 - 9 VIBRATION TEST ————— TEMPERATURE: 25°C
ORIENTATION: X, Y, Z
POWER: NON-OPERATING
VIBRATION LEVEL: OVERALL
gRMS = 3.2


FREQUENCY(Hz)	PSD (G ² /Hz)
10	0.040
20	0.100
40	0.100
800	0.002
1000	0.002

TEST TIME: 2 HRS FOR EACH
DIRECTION

SPECIFICATION FOR APPROVAL

4 - 10 SHOCK TEST ————— TEMPERATURE: 25 °C
ORIENTATION: X, Y, Z
POWER: NON-OPERATING
ACCELERATION: 50G MAX.
PULSE: 11 ms HALF-SINE WAVE
NUMBER OF SHOCKS: 5 SHOCKS
FOR EACH DIRECTION

4 - 11 NOISE TEST ————— MEASURED IN A
SEMI-ANECHOIC CHAMBER
WITH BACKGROUND NOISE
LEVEL BELOW 15 dB(A). THE
FAN IS RUNNING IN FREE AIR
WITH THE MICROPHONE AT A
DISTANCE OF ONE METER FROM
THE FAN INTAKE.
NOISE TESTER MODEL:
AWA14411

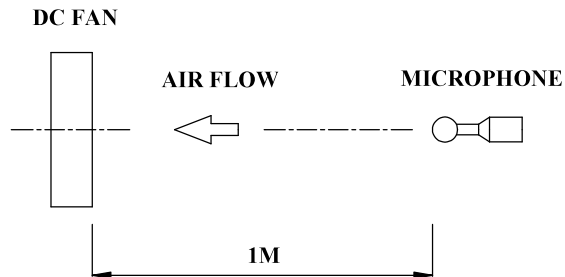

SPECIFICATION FOR APPROVAL

5. NOTES

- 5 - 1 EVERFLOW SHALL NOT GUARANTEE THE PERFORMANCE OF THE PRODUCTS IF THE APPLICATION CONDITION FALLS OUTSIDE THE PARAMETERS SET FOR THE SPECIFICATION . A WRITTEN REQUEST SHOULD BE SUBMITTED TO EVERFLOW PRIOR TO APPROVAL IF DEVIATION FROM THIS SPECIFICATION IS REQUIRED.
- 5 - 2 THE ABOVE STANDARD SHALL BE THE SPECIFIED VALUE AT NORMAL TEMPERATURE(25 °C) AND NORMAL HUMIDITY(60~65%) UNLESS OTHERWISE NOTED.
- 5 - 3 IT IS VERY IMPORTANT TO ESTABLISH THE CORRECT POLARITY, POSTIVE(+) AND NEGATIVE(-), BEFORE CONNECTING THE FAN TO THE POWER SOURCE. DAMAGE MAY BE CAUSED TO THE FANS IF CONNECTION IS WITH REVERSE POLARITY. THERE IS NO FOOLPROOF METHOD TO PROTECT AGAINST SUCH ERROR SPECIFICALLY MENTIONED IN THIS SPEC.
- 5 - 4 PLEASE EXERCISE CAUTION WHEN MOUNTING THE FAN, AS INCORRECT INSTALLATION MAY RESULT IN EXCESSIVE RESONANCE, VIBRATION, SUBSEQUENT NOISE, AND EVEN DAMAGED SCREW HOLES.
- 5 - 5 PLEASE EXERCISE CAUTION WHEN HANDLING FANS. DAMAGE MAY BE CAUSED IF PRESSURE IS APPLIED TO THE IMPELLER, OR THE FANS ARE HANDLED BY THE LEAD WIRES OR THE FAN WAS HARD-DROPPED TO THE PRODUCTION FLOOR.
- 5 - 6 ANY REVISIONS ON THE SPECIFICATION SHALL BE DONE BASED ON MUTUAL DISCUSSION AND AGREEMENT.

SPECIFICATION FOR APPROVAL

- 5 - 7 PLEASE ENSURE THAT ALL THE FANS ARE STORED ACCORDING TO THE SPECIFIED STORAGE TEMPERATURE LIMITS. DO NOT STORE FANS IN A HIGH HUMIDITY ENVIRONMENT. WE HIGHLY RECOMMEND CONDUCTING PERFORMANCE TESTING BEFORE SHIPPING IF THE FANS HAVE BEEN STORED OVER SIX MONTHS.
- 5 - 8 NOT ALL FANS ARE PROVIDED WITH THE LOCK ROTOR PROTECTION FEATURE. IF YOU IMPAIR THE ROTATION OF THE FANS THAT DO NOT HAVE THIS FUNCTION, THE PERFORMANCE OF THOSE FANS SHALL LEAD TO FAILURE.
- 5 - 9 EVERFLOW FANS WITHOUT SPECIAL PROTECTION ARE NOT SUITABLE WHERE ANY CORROSIVE FLUIDS ARE INTRODUCED TO THEIR ENVIRONMENT.
- 5 - 10 IT IS IMPORTANT TO CONSIDER SAFETY WHEN TESTING THE FANS. A SUITABLE FAN GUARD SHOULD BE FITTED TO THE FAN TO GUARD AGAINST ANY POTENTIAL PERSONAL INJURY.
- 5 - 11 ALL THE FANS SHALL MEET THE QUALITY INSPECTION UNDER SAMPLING PLAN MIL-STD-105E AS FOLLOWS WITH EXCEPTIONS PERTAINING TO CERTAIN SPECIAL DESIGNS. THERE IS NO GUARANTEE THAT THE PRODUCTS SHALL BE FREE FROM SAFETY PROBLEMS OR FAILURES CAUSED BY DISRUPTION DUE TO DUST, SUBMERSION INTO WATER OR ENCROACHMENT BY INSECTS INTO THE HUB.
- 5 - 12 ANY ITEM WHICH MAYBE NEEDED TO ADD INTO SPECIFICATION SHALL BE DETERMIND BY CUSTOMER'S PRIOR WRITTEN REQUEST. IF NO SUCH REQUEST IS MADE, FAN SHALL BE BASED ON OUR STANDARD SPECIFICATION.


SPECIFICATION FOR APPROVAL

- 5 - 13 CUSTOMER SHALL CONFIRM THE COMPATIBILITY AND RELIABILITY OF THE FAN IN THE ACTUAL SETUP OR UNIT APPLICATION. THIS INCLUDES CONFIRMATION ON SET OR UNIT LIFE, ELECTRICAL NOISE, MECHANICAL NOISE, VIBRATION, STATIC ELECTRICITY, ELECTRIC POWER NOISE, DRIFT, ELECTRIC RESONANCE BETWEEN MOTOR AND CONTROL CIRCUIT, MECHANICAL RESONANCE BETWEEN MOTOR AND CHASSIS, IRREGULAR MOVEMENT OF SET DUE TO MOTOR NOISE, IRREGULAR MOVEMENT OF SET IN STRONG ELECTROMAGNETIC FIELD, POTENTIAL DAMAGE CAUSED BY LIGHTNING SURGE AND EARTHING METHOD ETC.
- 5 - 14 IF ANY ISSUE RELATING TO FAN OCCURS, BOTH PARTIES SHALL DISCUSS ON THIS SPECIFICATION, PROVIDED HOWEVER, THAT OUR GUARANTEE IS ONLY LIMITED TO FANS.
- 5 - 15 PLEASE BE CERTAIN TO CONNECT AN “4.7 μ F OR GREATER” CAPACITOR TO THE FAN EXTERNALLY WHEN THE APPLICATION CALLS FOR USING MULTIPLE FANS IN PARALLEL TO AVOID ANY UNSTABLE POWER.

SPECIFICATION FOR APPROVAL

6. DIMENSIONS DRAWING (Unit: mm)


EF Part No. : F126056BM

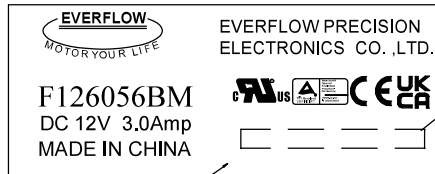



BACKGROUND COLOR: GREEN
WORD COLOR: BLACK



铭板贴示方向



ROTATION →

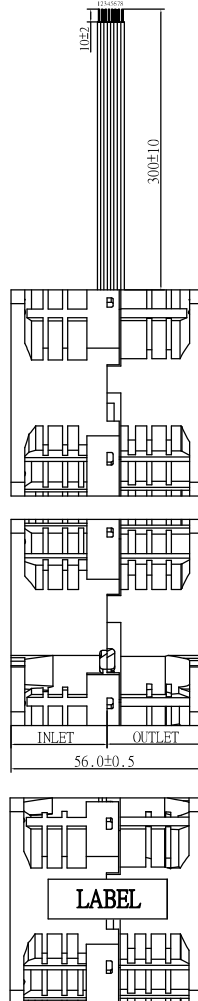

ROTATION →


1. LEAD WIRE UL 1061 AWG#24/26
PIN 1: BLACK WIRE---(- ,INLET , #24AWG)
PIN 2: RED WIRE---(+ ,INLET , #24AWG)
PIN 3: YELLOW WIRE---(FG , INLET , #26AWG)
PIN 4: BLUE WIRE---(PWM ,INLET , #26AWG)
PIN 5: GRAY WIRE---(- , OUTLET , #24AWG)
PIN 6: ORANGE WIRE---(+ , OUTLET , #24AWG)
PIN 7: WHITE WIRE---(FG , OUTLET , #26AWG)
PIN 8: GREEN WIRE---(PWM , OUTLET , #26AWG)
2. EXPOSED WIRE LENGHT:300±10mm

SPECIFICATION FOR APPROVAL

7. FG CHARACTERISTICS & DEFINITION

● FREQUENCY GENERATOR(FG) SIGNAL

SCHEMATIC:

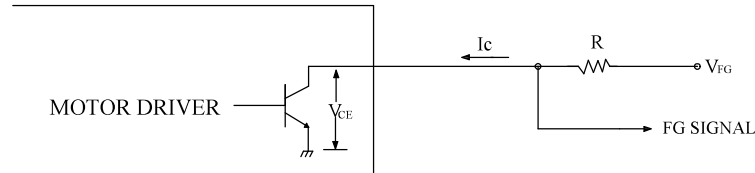

CAUTION:

PLEASE BE CAREFUL THAT REVOLUTION SIGNAL LEAD WIRE SHOULD NOT DIRECTLY HAVE ANY VOLTAGE APPLIED.(IT WOULD DAMAGE INNER CIRCUIT)

● SIGNAL SPECIFICATION

OUTPUT TYPE: OPEN COLLECTOR


V_{FG} MAXIMUM VOLTAGE = 5.5 V

I_C MAXIMUM CURRENT = 5 mA

LOW LEVEL VOLTAGE = 0.7 V MAX

$R \geq V_{FG} / I_C$, WHEN V_{FG} = 3.3 V, WE RECOMMEND R = 10 kΩ

● FREQUENCY GENERATOR WAVEFORM

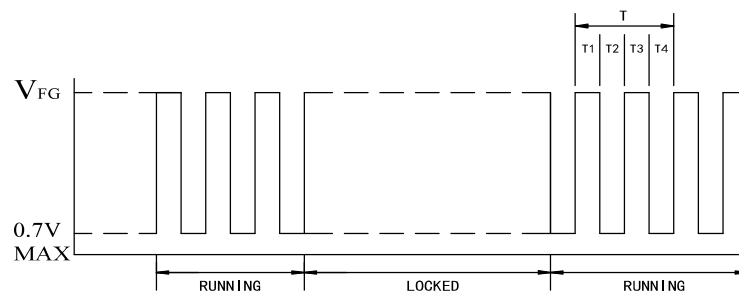


$T = T1 + T2 + T3 + T4 = 60/N$ Sec, WHERE N REPRESENTS RPM

SPECIFICATION FOR APPROVAL

8. PWM CHARACTERISTICS & DEFINITION


● PWM CIRUIT (FOR REFERENCE)

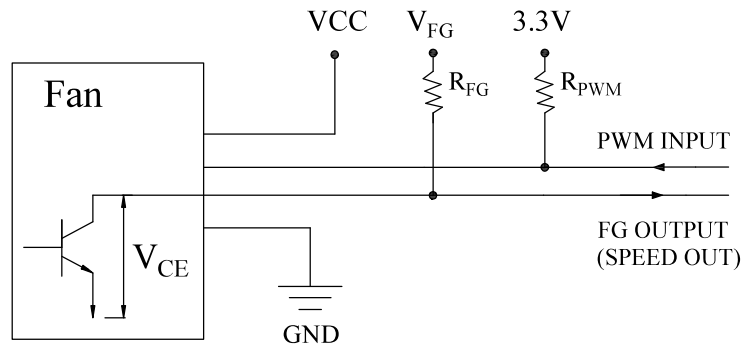

WHEN $V_{PWM} = 3.3 \text{ V}$, WE RECOMMEND $R_{PWM} = 1 \sim 10 \text{ k}\Omega$

● PWM CONTROL SIGNAL INPUT

SIGNAL VOTAGE RANGE: DC 0V ~ 5.5V

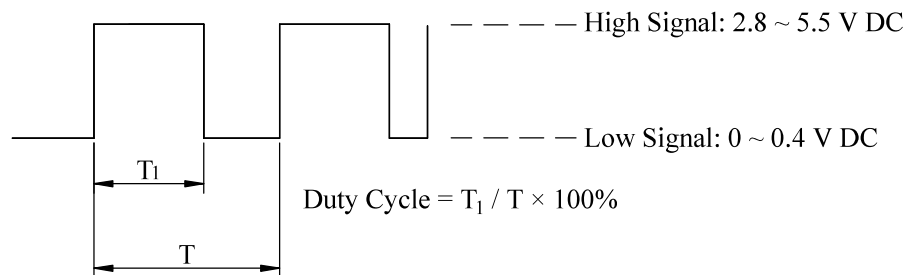

1. THE FREQUENCY OF PWM SIGNAL SHALL BE ABLE TO ACCEPT 21KHZ-28KHZ.
2. AT 100% DUTY CYCLE, THE FAN WILL OPERATE AT MAXIMUM SPEED.
3. THE FAN WILL DEFAULT TO OPERATE AT MAXIMUM SPEED WHEN THE SPEED CONTROL INPUT (PWM) IS LEFT UNCONNECTED.

SPECIFICATION FOR APPROVAL

9. P - Q CURVE


TEST CONDITION

INPUT VOLTAGE ————— OPERATION VOLTAGE (12 V DC)

TEMPERATURE ————— ROOM TEMPERATURE

HUMIDITY ————— 65% RH

P(mm-H₂O)

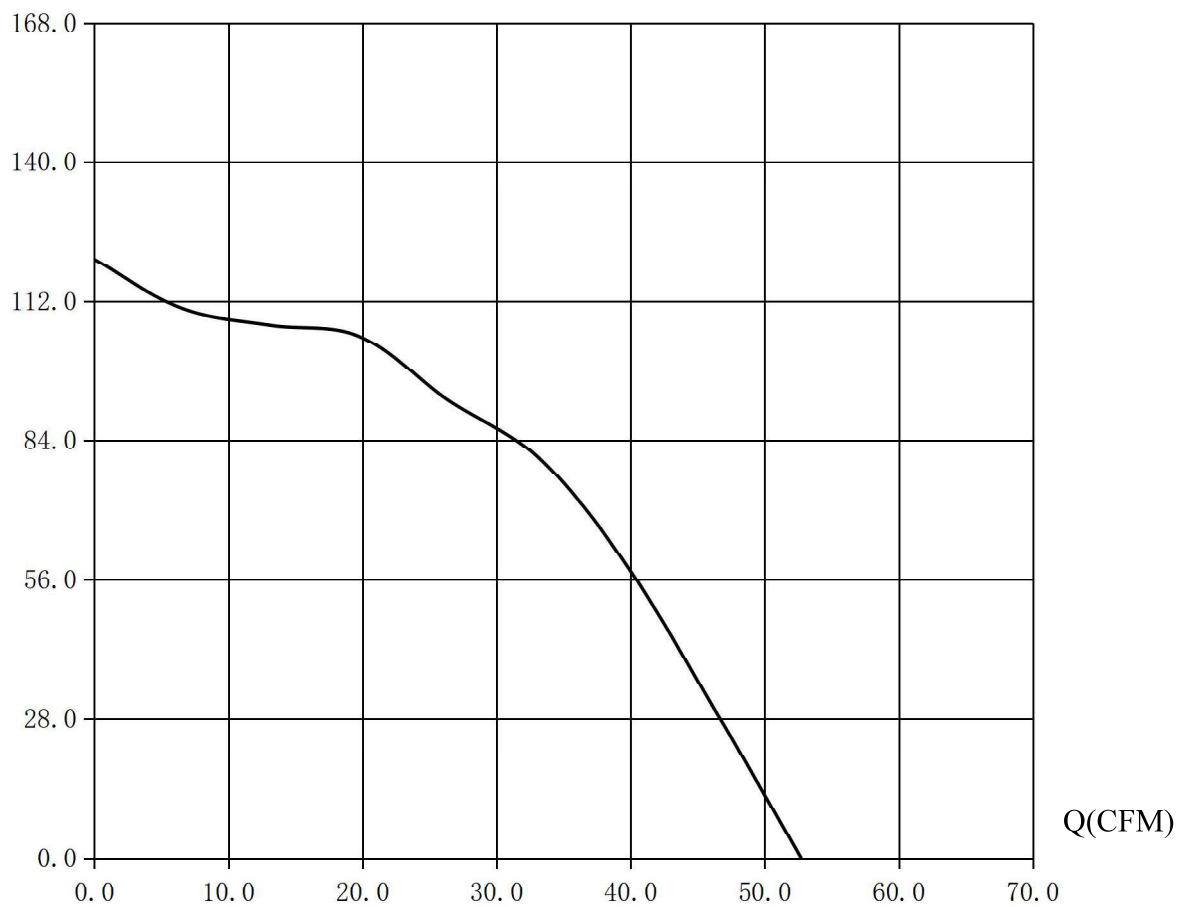

Zertifikat Certificate



Zertifikat Nr. Certificate No.
R 50035343

Blatt Page
0011

Ihr Zeichen Client Reference
P01259292

Unser Zeichen Our Reference
ZTW1-YML- 10008452 012

Ausstellungsdatum
06.12.2023

Date of Issue
(day/mo/yr)

Genehmigungsinhaber License Holder

Everflow Precision Electronic
(Dong Guan) Co., Ltd.
GeKeng Industrial Zone
Heng Li Town
Dongguan City
523460 Guangdong
P.R. China

Fertigungsstätte Manufacturing Plant

Everflow Precision Electronic
(Dong Guan) Co., Ltd.
GeKeng Industrial Zone
Heng Li Town
Dongguan City
523460 Guangdong
P.R. China

Prüfzeichen Test Mark



Geprüft nach Tested acc. to

EN IEC 62368-1:2020+A11

Zertifiziertes Produkt (Geräteidentifikation)
Certified Product (Product Identification)

Lizenzentgelte - Einheit
License Fee - Unit

Ventilator (DC Fan)

Ergänzung (Addition)

Bezeichnung (Type Designation):

R244020YLZ, F244020YLZ, T244020YLZ,
R244020YMLZ, F244020YMLZ, T244020YMLZ,
R244020YHZ, F244020YHZ, T244020YHZ,
R244020YUZ, F244020YUZ, T244020YUZ,
R122515YLZ, F122515YLZ, T122515YLZ,
R122515YMLZ, F122515YMLZ, T122515YMLZ,
R122515YHZ, F122515YHZ, T122515YHZ,
R122515YUZ, F122515YUZ, T122515YUZ,
R052515YLZ, F052515YLZ, T052515YLZ,
R052515YMLZ, F052515YMLZ, T052515YMLZ,
R052515YHZ, F052515YHZ, T052515YHZ,
R052515YUZ, F052515YUZ, T052515YUZ,
R126056YLZ, F126056YLZ, T126056YLZ,
R126056YMLZ, F126056YMLZ, T126056YMLZ,
R126056YHZ, F126056YHZ, T126056YHZ,
R126056YUZ, F126056YUZ, T126056YUZ (EVERFLOW)

Fortsetzung Blatt (continued on page) 12

ANLAGE (Appendix): 2

Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde und es bestätigt die Konformität des Produktes mit den oben genannten Standards und Prüfgrundlagen. Zusätzliche Anforderungen in Ländern, in denen das Produkt in Verkehr gebracht werden soll, müssen zusätzlich betrachtet werden. Die Herstellung des zertifizierten Produktes wird überwacht.
This certificate is based on our Testing and Certification Regulation and states the conformity of the product with the standards and testing requirements as indicated above. Any additional requirements in countries where the product is going to be marketed have to be considered additionally. The manufacturing of the certified product is subject to surveillance.



Zertifizierungsstelle

Dipl.-Ing. (FH) A. Klinker

TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg
Tel.: (+49/221)8 06 - 13 71 e-mail: cert-validity@de.tuv.com
Fax: (+49/221)8 06 - 39 35 http://www.tuv.com/safety

EMTEK (Dongguan) Co., Ltd.
Cici Zhang

Date : 06.12.2023
Our ref. : YML ZTW1
Your ref.: P01259292

No.2 Office, Building A, No.9 New
Town
Avenue of SongshanLake High and New
Technology Industrial Development
Zone
Dongguan,
523000 Guangdong
P.R. China

Ref : R TÜV-Mark Approval

Type of Equipment : DC Fan
Model Designation : See Certificate
Certificate No. : R 50035343 0011
Report No. : 10008452 012

Dear Cici Zhang,

Enclosed please find above certification documents.
Please forward these originals to the certificate holder.

If you contact our office, please quote our reference above.

We thank you for your cooperation.

The certificate holder is: Everflow Precision Electronic
(Dong Guan) Co., Ltd.

With kind regards,

Certification Body



Dipl.-Ing. (FH) A. Klinker

Enclosure

TÜV RHEINLAND TAIWAN LTD.

11F., No. 758, Sec. 4, Bade Rd.,
Songshan Dist., Taipei City 105,
Taiwan, R. O. C.
Tel. (02) 2172-7000
Fax (02) 2172-1322
<http://www.tuv.com>

NEW TAIPEI BRANCH:
No. 458-18 & 458-19,
Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244,
Taiwan, R. O. C.
Tel. (02) 2172-1000
Fax (02) 2172-1322

TAICHUNG BRANCH:
3F., No. 497, Zhongming South Rd.,
West Dist., Taichung City 403,
Taiwan, R. O. C.
Tel. (02) 2172-7000
Fax (02) 2172-1322

KAOSIUNG BRANCH:
27F.-3, No.80, Minzu 1st Rd.,
Sanmin Dist., Kaohsiung City 807,
Taiwan, R. O. C.
Tel. (07) 262-6000
Fax (07) 380-0577

Everflow Precision Electronic (Dong
Guan) Co., Ltd.
Frau Li Juan Chen

Date : 06.12.2023
Our ref. : YML ZTW1
Your ref.: P01259292

GeKeng Industrial Zone
Heng Li Town
Dongguan City
523460 Guangdong
P.R. China

Ref : R TÜV-Mark Approval

Type of Equipment : DC Fan
Model Designation : See Certificate
Certificate No. : R 50035343 0011
Report No. : 10008452 012

Dear Frau Li Juan Chen,

The above specified equipment has been tested and found to be in
accordance with the relevant requirements.

Please find enclosed your certificate as specified above.

If cancellation of the certificate is submitted by 15 November in a
given year, no fee will be charged for the following year.

The certificate is issued with the reservation that the license holder
applies all information required in § 6 of the ProdSG related to name
and address of the manufacturer or his authorized representative /
importer, including their respective contact addresses on the product
prior to marketing of the product in the European Economic Area.
In case you have a change regarding your involved local representative
for the certificate, please inform us in due time.

With kind regards,

Certification Body



Dipl.-Ing. (FH) A. Klinker

CC: EMTEK (Dongguan) Co., Ltd.

Enclosure

TÜV RHEINLAND TAIWAN LTD.

11F., No. 758, Sec. 4, Bade Rd.,
Songshan Dist., Taipei City 105,
Taiwan, R. O. C.
Tel. (02) 2172-7000
Fax (02) 2172-1322
<http://www.tuv.com>

NEW TAIPEI BRANCH:
No. 458-18 & 458-19,
Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244,
Taiwan, R. O. C.
Tel. (02) 2172-1000
Fax (02) 2172-1322

TAICHUNG BRANCH:
3F., No. 497, Zhongming South Rd.,
West Dist., Taichung City 403,
Taiwan, R. O. C.
Tel. (02) 2172-7000
Fax (02) 2172-1322

KAOHSIUNG BRANCH:
27F.-3, No.80, Minzu 1st Rd.,
Sanmin Dist., Kaohsiung City 807,
Taiwan, R. O. C.
Tel. (07) 262-6000
Fax (07) 380-0577

Note: We are enhancing our systems and you may notice duplicate entries/missing/outdated data. During this interim period, please contact our Customer Service at <https://www.ul.com/about/locations>.

Fans, Electric - Component

COMPANY

EVERFLOW PRECISION ELECTRONIC (DONG GUAN) CO LTD

GE KENG INDUSTRIAL ZONE

HENG LI TOWN

DONGGUAN, Guangdong Sheng 523460 China

E236658

Marking: Company name or tradename "E236658", or trademark  ,  , and model designation.

Note: For additional marking information, refer to the [Guide Information Page](#).

Model(s): 103142H, 103142L, 103142M, B126013BH, B126013BM, B126013BU, B127015BH, B127015BM, B127015BU

Model(s): (A)121225(C)(x)(Z) Above (A) may be R or F, (C) may be S, D or B, (x) may be U, H, M or L, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", or blank.

Model(s): (A)121238(C)(x)(Z) Above (A) may be R or F, (C) may be S, D or B, (x) may be U, H, M or L, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", or blank.

Model(s): (A)124028(C)(D)(Z) Above (A) may be R, F, T represents screw hold on Frame, (C) may be S, D or B represents Bearing Type, (D) may be L, M, H or U represents Fan Speed, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", or blank.

Model(s): (A)124028(C)(x)(Z) Above (A) may be R or F, (C) may be S, D or B, (x) may be U, H, M or L, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", or blank.

Model(s): (A)126038(C)(x)(Z) Above (A) may be R or F, (C) may be S, D or B, (x) may be U, H, M or L, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", or blank.

Model(s): (A)128038(C)(x)(Z) Above (A) may be R or F, (C) may be S, D or B, (x) may be U, H, M or L, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", or blank.

Model(s): (A)128056(C)(x)(Z) Above (A) may be R or F, (C) may be S, D or B, (x) may be U, H, M or L, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", or blank.

Model(s): (A)128080(C)(x)(Z) Above (A) may be R or F, (C) may be S, D or B, (x) may be U, H, M or L, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", or blank.

Model(s): F128080CDZ C may be B, D or S, D may be L, M, H or U. Z may be A through Z, 0 through 9, "(", ")", "-", or blank

Model(s): F248080CDZ C may be B, D or S, D may be L, M, H or U. Z may be A through Z, 0 through 9, "(", ")", "-", or blank

Model(s): F488080CDZ A may be R, F or T, C may be B, D or S, D may be L, M, H or U. Z may be A through Z, 0 through 9, "(", ")", "-", or blank

Model(s): F548080CDZ C may be B, D or S, D may be L, M, H or U. Z may be A through Z, 0 through 9, "(", ")", "-", or blank

DC Fans, Model(s): R(B/12)8020BU(Z) , where (B/12) may be B or 12, (Z) stands for 20 variables, each variable may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

DC Fans, Model(s): R(C/24)8032(Y)(V)(Z) , Where (C/24) may be C or 24, (Y) may be S, D or B, (V) may be L, M, H or U, (Z) stands for 20 variables, each variable may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Electric Fans - Component, Model(s): (A)(B)1817(C)L(Z) , where (A) may be R or F, (B) may be A or 05, (C) may be S, B, D or C, (Z) stands for 20 variables, each variable may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Electric Fans - Component, Model(s): (A)052515(C)(X)(Z) (A) may be R, F or T, (C) may be B, D or S, (X) may be L, M, H or U, (Z) may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Electric Fans - Component, Model(s): (A)122515(C)(X)(Z) (A) may be R, F or T, (C) may be B, D or S, (X) may be L, M, H or U, (Z) may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Electric Fans - Component, Model(s): (A)126056(C)(X)(Z) (A) may be R, F or T, (C) may be B, D or S, (X) may be L, M, H or U, (Z) may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Electric Fans - Component, Model(s): (A)128015(C)(D)(Z) , Where (A) may be R, F, T represents screw hold on Frame, (C) may be S, D or B represents Bearing Type, (D) may be L, M, H or U represents Fan Speed, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", "-" or blank.

Electric Fans - Component, Model(s): (A)128038B(D)(2)(Z) , Where (A) may be R, F, T represents screw hold on Frame, (D) may be L, M, H or U represents Fan Speed, (2) may be (2) or blank, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", "-" or blank.

Electric Fans - Component, Model(s): (A)129025(C)(D)(E)(Z) , Where (A) may be R, F, T represents screw hold on Frame, (C) may be S, D or B represents Bearing Type, (D) may be L, M, H or U represents Fan Speed, (E) may be (2), (3), (4), (5), (6) or blank represents different frames, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", "-" or blank.

Electric Fans - Component, Model(s): (A)244020(C)(X)(Z) (A) may be R, F or T, (C) may be B, D or S, (X) may be L, M, H or U, (Z) may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Electric Fans - Component, Model(s): B053510BU(Z) , where (Z) stands for 20 variables, each variable may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Electric Fans - Component, Model(s): B055015BL(Z) , where (Z) stands for 20 variables, each variable may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Low Voltage Component Fan, Model(s): (A)124020(C)H(5)(Z) , where (A) may be R, F for different numbers of screw holes on frame shapes, (C) may be S, D, B or C for different bearing types, (5) may be (5) or blank, (Z) stands for 20 variables, each variable may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Low Voltage Component Fan, Model(s): (A)124020(C)L(5)(Z) , where (A) may be R, F for different numbers of screw holes on frame shapes, (C) may be S, D, B or C for different bearing types, (5) may be (5) or blank, (Z) stands for 20 variables, each variable may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Low Voltage Component Fan, Model(s): (A)124020(C)M(5)(Z) , where (A) may be R, F for different numbers of screw holes on frame shapes, (C) may be S, D, B or C for different bearing types, (5) may be (5) or blank, (Z) stands for 20 variables, each variable may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Low Voltage Component Fan, Model(s): (A)124020(C)U(5)(Z) , where (A) may be R, F for different numbers of screw holes on frame shapes, (C) may be S, D, B or C for different bearing types, (5) may be (5) or blank, (Z) stands for 20 variables, each variable may be A through Z, 0 through 9, "(", ")", "-", "-" or blank.

Low Voltage DC Components Fan, Model(s): (A)124056(Y)(X)(Z) Above (A) may be R or F, (Y) may be S, B, D or C, (X) may be U, H, M or L, (Z) stands for 20 variables, each variable maybe A-Z, 0-9, "(", ")", "-", "-" or blank.

Low Voltage DC Components Fan, Model(s): F056025BH(+) Where (+) can be any seven combination of digit or letter.

Low Voltage DC Components Fan, Model(s): R248025BM(+) Where (+) can be any seven combination of digit or letter.

Last Updated on 2024-01-10

Certificate of Conformity

NO.:EDG2309150032E00301C

The following products have been tested by us with the listed standards and found in conformity with the council EMC directive 2014/30/EU. This is to certify that the specimen is in conformity with the assessment requirement mentioned follow. This certificate does not imply assessment to the production of the product.

Applicant : Everflow precision Electronic(Dong Guan)Co.,Ltd.

Address : GeKeng Industrial Zone Heng Li Town Dongguan City 523460
Guangdong P.R.China

Manufacturer : Everflow precision Electronic(Dong Guan)Co.,Ltd.

Address : GeKeng Industrial Zone Heng Li Town Dongguan City 523460
Guangdong P.R.China

Trade Mark : N/A

EUT : DC FAN

M/N : X244020YLZ, X244020YMZ, X244020YHZ, X244020YUZ,
X126056YLZ, X126056YMZ, X126056YHZ, X126056YUZ,
X122515YLZ, X122515YMZ, X122515YHZ, X122515YUZ,
X052515YLZ, X052515YMZ, X052515YHZ, X052515YUZ
(where "X"=R, F, T, B indicate frame Type; Y=B, D, S indicate bearing
Type; Z stands for 20 variables, each variable may be A through Z, 0
through 9, "(", ")", "-", or blank)

Test Standards : EN 55032:2015+A1:2020
EN 55035:2017+A11:2020

Version : Ver.1.0



Sam Lv(Manager)

October 17, 2023

The certificate is based on a single evaluation of five samples of above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

EMTEK (Dongguan) Co., Ltd.

Add: -1&2/F., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base, No.9, Xincheng Avenue, Songshanhu High-Technology Industrial Development Zone, Dongguan, Guangdong, China [Http://www.emtek.com.cn](http://www.emtek.com.cn) E-mail: project@emtek.com.cn



Certificate of Conformity

NO.:EDG2309150032E00401C

The following product has been tested by us with the listed standards and found in conformity with Electromagnetic Compatibility Regulations 2016. It is possible to use UKCA marking to demonstrate the conformity with this Regulations.

Applicant : Everflow precision Electronic(Dong Guan)Co.,Ltd.

Address : GeKeng Industrial Zone Heng Li Town Dongguan City 523460
Guangdong P.R.China

Manufacturer : Everflow precision Electronic(Dong Guan)Co.,Ltd.

Address : GeKeng Industrial Zone Heng Li Town Dongguan City 523460
Guangdong P.R.China

Trade Mark : N/A

EUT : DC FAN

M/N : X244020YLZ, X244020YMZ, X244020YHZ, X244020YUZ,
X126056YLZ, X126056YMZ, X126056YHZ, X126056YUZ,
X122515YLZ, X122515YMZ, X122515YHZ, X122515YUZ,
X052515YLZ, X052515YMZ, X052515YHZ, X052515YUZ
(where "X"=R, F, T, B indicate frame Type; Y=B, D, S indicate bearing
Type; Z stands for 20 variables, each variable may be A through Z, 0
through 9, "(", ")", "-", or blank)

Test Standards : BS EN 55032:2015+A1:2020
BS EN 55035:2017+A11:2020

Version : Ver.1.0



Sam Lv(Manager)

October 17, 2023

The certificate is based on a single evaluation of five samples of above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

EMTEK (Dongguan) Co., Ltd.

Add: -1&2/F., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base, No.9, Xincheng Avenue, Songshanhu High-Technology Industrial Development Zone, Dongguan, Guangdong, China [Http://www.emtek.com.cn](http://www.emtek.com.cn) E-mail: project@emtek.com.cn

